



Connectors, reducers and couplers

- HG-HG Conduit Connector, IP66

Features and Benefits

- One piece, fast fit
- Joins corrugated conduits




HelaGuard HG-HG Coupler.

MATERIAL	Polyamide 6.6 (PA66)
Operating Temperature	-50 °C to +135 °C
Specifications	UL-Recognised

HF ✓

RoHS ✓

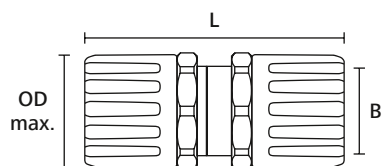

HelaGuard fitting, coupler

TYPE	From nominal diameter	To nominal diameter	Min. Bore Size (B)	Outside Ø max (OD max.)	Length (L)	Pack Cont.	Colour	Article-No.
HG16-HG16	16	16	11.0	29	59	10 pcs.	Black (BK)	166-24600
HG21-HG21	21	21	14.5	32	71	10 pcs.	Black (BK)	166-24601
HG28-HG28	28	28	19.5	44	81	10 pcs.	Black (BK)	166-24602
HG34-HG34	34	34	26.5	51	87	10 pcs.	Black (BK)	166-24603

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content.



Please note! Not all products listed on this page may have this approval.