




Rating	Input:12V/24 DC Output:5V DC 2.4A max.	<div>Mounting Hole</div> 
Insulation Resistance	DC 500V 100MΩ Min.	
Dielectric Strength	AC 1500V 1 minute	
Operating Temperature	-0℃~40℃	

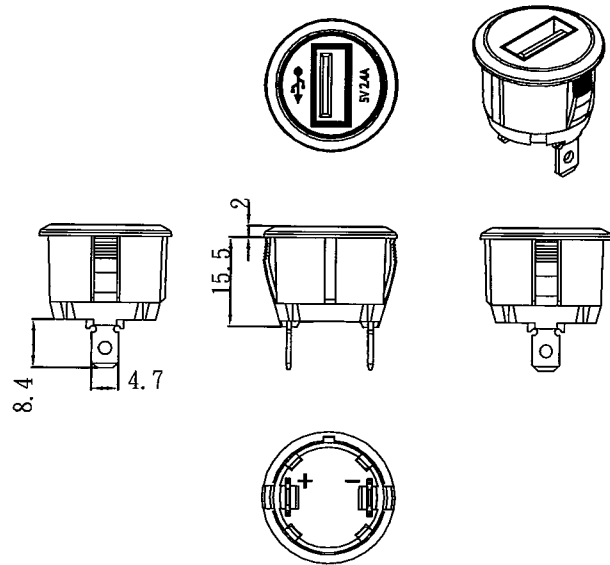

Black painted body /
black base / blue LED

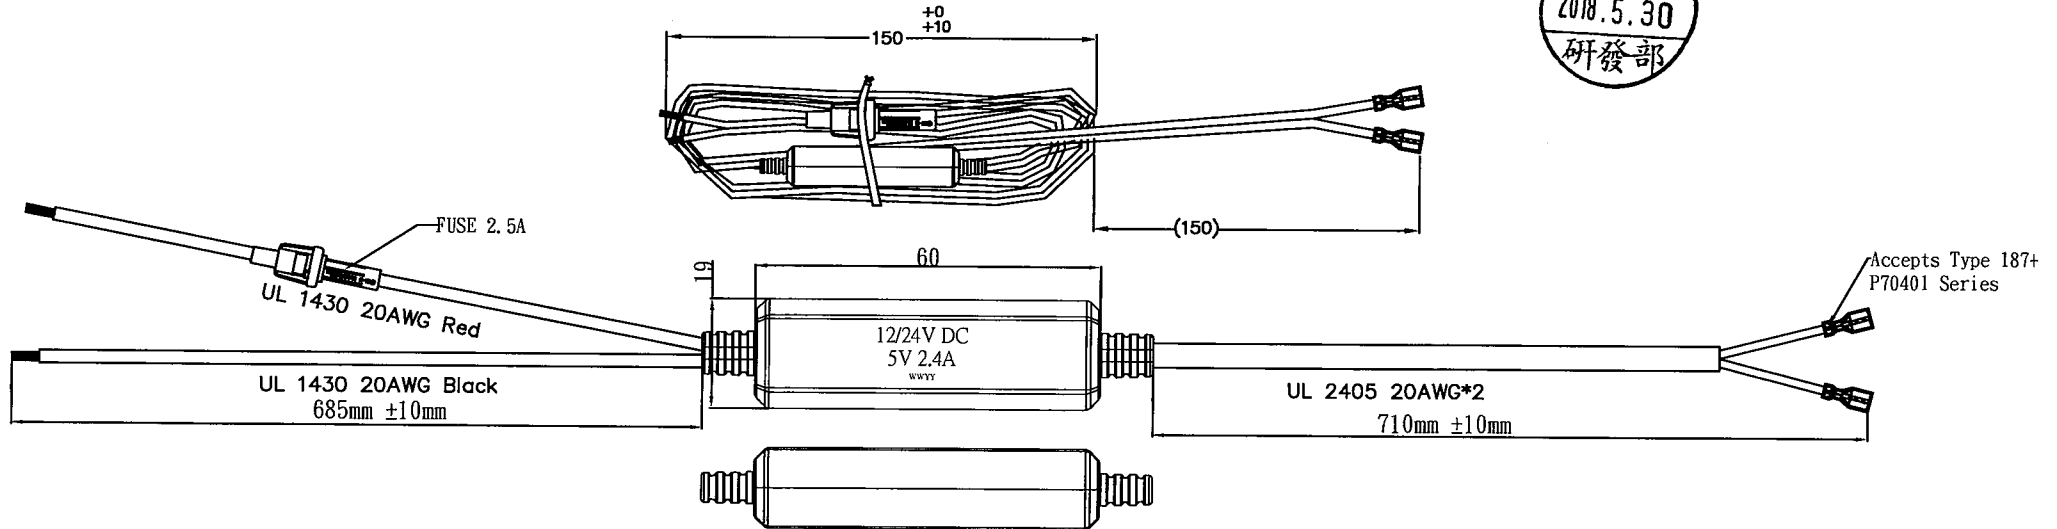

原稿
2018.5.30
研發部

A3

			△	Drawn	Checked	Approved	SCI BOM No.	1251733	Model Name	USB sockets	
			△	蘇承民	蘇承民	李松明	Customer No.		Model No.	A13-234CUB-W1	Rev.
Date	Name	Description	No.	20180516	20180516	20180516	Unit	mm	Shin Chin Industrial Co., Ltd.		0