


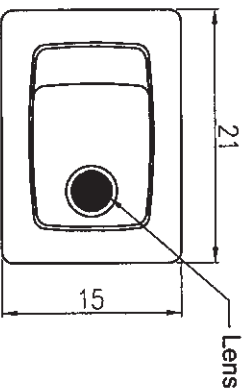

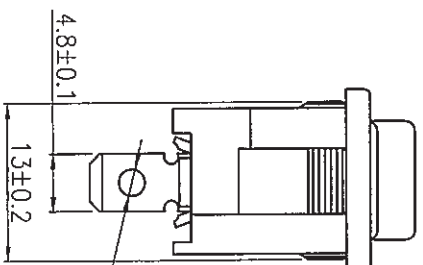
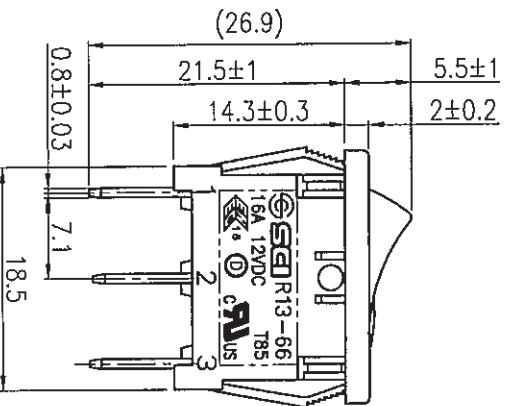



Rating	16A 12V DC			<div>Mounting Hole</div> 	<div>Circuit Diagram</div> 											
Contact Resistance	50m ohm Max															
Insulation Resistance	DC 500V 100M ohm Min															
Dielectric Strength	AC 1500V 1 minute															
Operation Temperature	-25°C-85°C															
Switch Function	3P SPST ON-OFF(LED)			<div>Thickness</div> <table><tr><td></td><td>X</td><td>Y</td></tr><tr><td>0.75...</td><td>1.25</td><td>19.2-0.1</td></tr><tr><td>1.25...</td><td>2</td><td>13+0.1</td></tr><tr><td>2...</td><td>3</td><td>19.8-0.1</td></tr></table>		X	Y	0.75...	1.25	19.2-0.1	1.25...	2	13+0.1	2...	3	19.8-0.1
	X	Y														
0.75...	1.25	19.2-0.1														
1.25...	2	13+0.1														
2...	3	19.8-0.1														



Material:
Frame: Black, Nylon 66
Actuator: Black, Nylon66
Lens: Green , PC
LED: Green



ON OFF



Tolerances Unless Otherwise Specified ±0.3

Date	Name	Description				No.			
Drawn	Checked	Approved	SCI BOM No	1821429	Model Name	ROCKER SWITCH			
張東	張東	張東	Customer No		Model No.	R13-66B2-02	Rev.		
9/27/12	9/27-12	9/27-12	Unit	mm	Shin Chin Industrial Co., Ltd.				0