


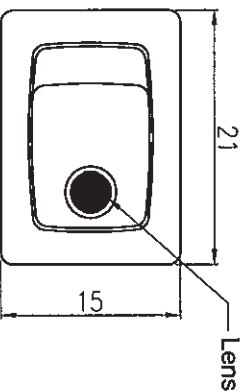

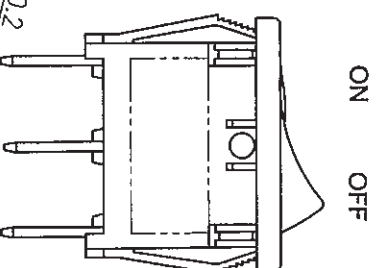
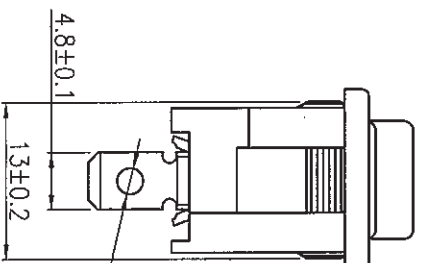
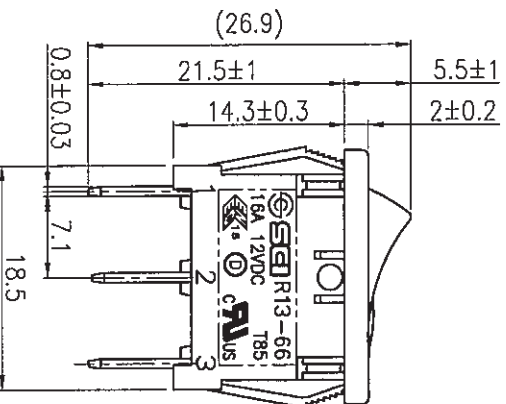


Rating	16A 12V DC			<div>Mounting Hole</div> 	<div>Circuit Diagram</div>  <p>12V LED</p> <p>R=680Ω</p>
Contact Resistance	50m ohm Max				
Insulation Resistance	DC 500V 100M ohm Min				
Dielectric Strength	AC 1500V 1 minute				
Operation Temperature	-25°C~85°C				
Switch Function	3P SPST ON-OFF(LED)				
		Thickness	X	Y	
		0.75...1.25	19.2-0.1	13+0.1	
		1.25...2	19.4-0.1	13+0.1	
		2...3	19.8-0.1	13+0.1	



Material:  
Frame: Black, Nylon 66  
Actuator: Black, Nylon66  
Lens: Amber, PC  
LED: Amber



Tolerances Unless Otherwise Specified ±0.3

Date	Name	Description		No.
Drawn	Checked	Approved	SCI BOM No	Model Name
張東	Bin	Sinitay	Customer No	R13-66B2-02
9/27/12	9/27-12	9/27-12	Unit	mm
Shin Chin Industrial Co., Ltd.				
Rev. 0				