



Rating	16A 125VAC 1/3HP 10A 250VAC 1/2HP		Mounting Hole		Circuit Diagram									
	10(4)A 250V~ 10E3													
	10A 125VAV, 6A 250VAC CQC													
Contact Resistance	50m ohm Max.													
Insulation Resistance	DC 500V 100M ohm Min.													
Dielectric Strength	AC 1500V 1 minute													
Operation Temperature	-25°C~85°C	<table><tr><th>Thickness</th><th>X</th><th>Y</th></tr><tr><td>0.75...1.25</td><td>19.2-0.1</td><td>13.2+0.1</td></tr><tr><td>1.25...2</td><td>19.4-0.1</td><td>13.2+0.1</td></tr><tr><td>2...3</td><td>19.8-0.1</td><td>13.2+0.1</td></tr></table>	Thickness	X	Y	0.75...1.25	19.2-0.1	13.2+0.1	1.25...2	19.4-0.1	13.2+0.1	2...3	19.8-0.1	13.2+0.1
Thickness	X	Y												
0.75...1.25	19.2-0.1	13.2+0.1												
1.25...2	19.4-0.1	13.2+0.1												
2...3	19.8-0.1	13.2+0.1												
Switch Function	3P SPST ON-OFF(Illuminated)													

***MATERIAL:**


Frame: Black, Nylon 66 (94-V2)

Actuator: Black, Nylon 66 (94-V2)




Lens: Red, PC (94-V2)

Terminals: Silver plated, Copper alloy

Printed: None

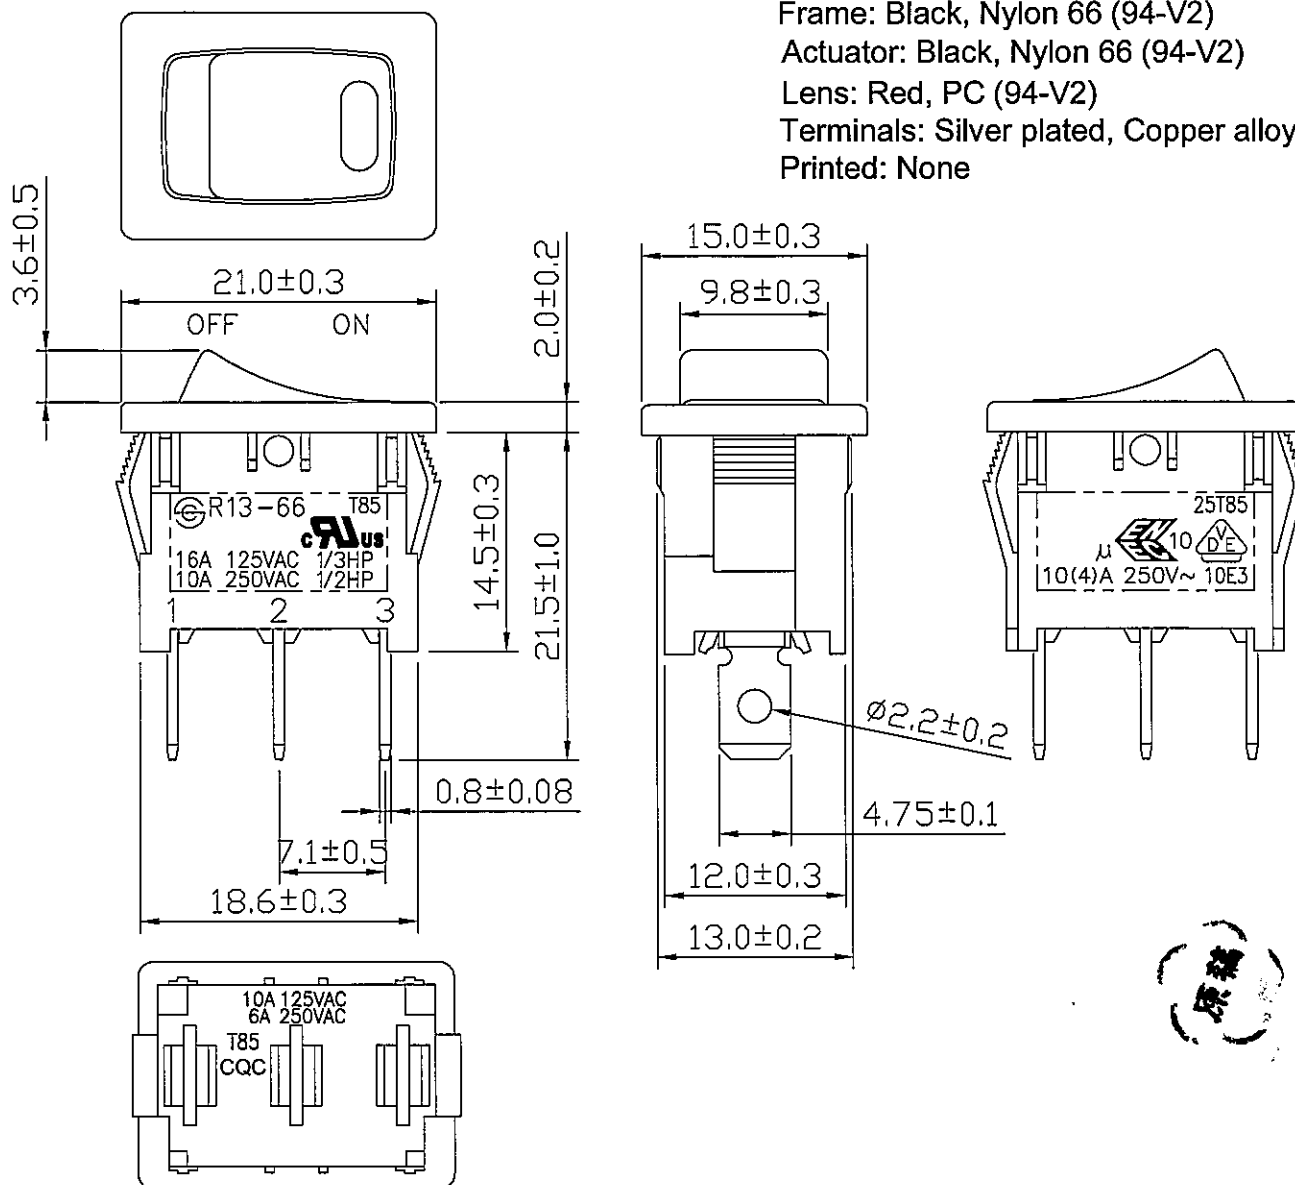

C8\R13\R13-66B4-02(1824988)

							△		
							△		
Date		Name		Description				No.	
Drawn	Checked	Approved	SCI BOM No.	1824988		Model Name	ROCKER SWITCH		
曹盈芳			Customer No.			Model No.	R13-66B4-02		Rev
10/22/10			Unit	mm		 Shin Chin Industrial Co., Ltd.			0