

## ■Features

- High Luminous LEDs
- 5mm Round Standard Directivity
- UV Resistant Epoxy
- Integral Current Limiting Resistor
- TTL Compatible (Requires No External Current Limiter With 5 Volt Supply)
- Cost Effective (Saves Space and Resistor Cost)
- Water Clear Type

## ■Applications

- Toys/ Games/ Audio
- Other Lighting

## ■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Voltage	V <sub>F</sub>	7.5	V
Reverse Voltage	V <sub>R</sub>	5	V
Power Dissipation	P <sub>D</sub>	150	mW
Operating Temperature	T <sub>opr</sub>	-30~+85	°C
Storage Temperature	T <sub>stg</sub>	-40~+100	°C
Lead Soldering Temperature	T <sub>sol</sub>	260°C/5sec	-

\*Pulse width Max.10ms Duty ratio max 1/10

## ■Electrical -Optical Characteristics

(Ta=25°C)


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Current* <sub>1</sub>	I <sub>F</sub> (YL)	V <sub>F</sub> =5V	-	12	20	mA
	I <sub>F</sub> (PG)	V <sub>F</sub> =5V	-	12	20	mA
DC Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	μA
Domi. Wavelength* <sub>2</sub>	λ <sub>D</sub> (YL)	V <sub>F</sub> =5V	585	590	595	nm
	λ <sub>D</sub> (PG)	V <sub>F</sub> =5V	520	525	530	nm
Luminous Intensity* <sub>3</sub>	I <sub>v</sub> (YL)	V <sub>F</sub> =5V	2180	3000	-	mcd
	I <sub>v</sub> (PG)	V <sub>F</sub> =5V	4200	5800	-	mcd
50% Power Angle	2θ <sub>1/2</sub>	V <sub>F</sub> =5V	-	30	-	deg

\*<sub>1</sub> Tolerance of measurements of forward current is ±1mA


\*<sub>2</sub> Tolerance of measurements of dominant wavelength is ±1nm

\*<sub>3</sub> Tolerance of measurements of luminous intensity is ±15%

## ■Outline Dimension

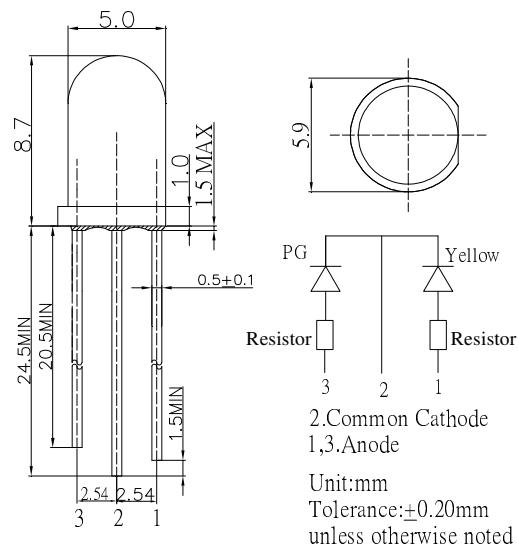

## ■Directivity

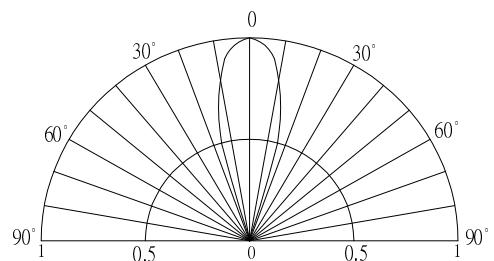

## LED & Application Technologies

