


Capacitor, film, Metallized Polypropylene, 0.33 uF, +/-10% Tol, -40/+85C, Power, 700 VAC

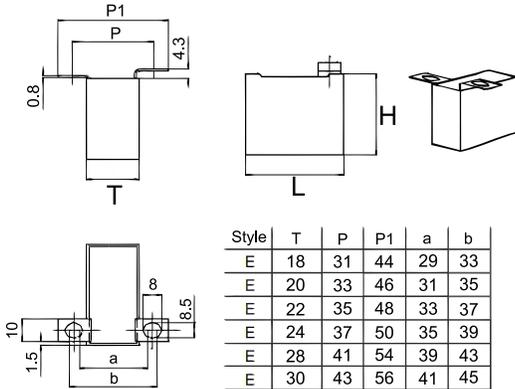

Style	T	P	P1	a	b
E	18	31	44	29	33
E	20	33	46	31	35
E	22	35	48	33	37
E	24	37	50	35	39
E	28	41	54	39	43
E	30	43	56	41	45

Dimensions (mm)		
Symbol	Dimension	Tolerance
L	41.5	NOM
H	40	NOM
T	20	NOM

Packaging Specifications	
Package Kind:	Bulk
Package Quantity:	52

General Information	
Supplier:	KEMET
Dielectric:	Metallized Polypropylene
Application:	Power
Style:	Radial Box
Features:	IGBT Circuit
RoHS:	Yes

Specifications	
Capacitance:	0.33 uF
Voltage:	2000 V
Tolerance:	+/-10%
Voltage AC:	700 VAC
Rated Temperature:	70C
Temperature Range:	-40/+85C
Maximum dVdT:	1379 v/us
Current/Ripple Current:	17 Amps (100kHz 70C)
Current/Ripple Current:	455 Amps (Peak)
Resistance/ESR:	7.2 mOhms (100kHz)
Inductance:	41 nH
Miscellaneous:	Kemet Style E Tabs