

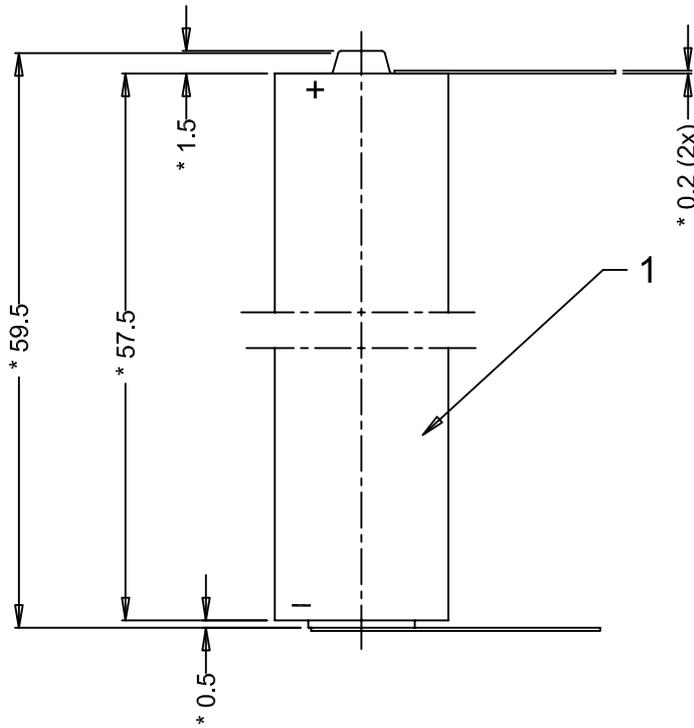


This is a controlled document.
 Hardcopy to be endorsed by authorised person.
 Check with Issuing Officer or SAP system for latest update.

Ensure weld tag does not obstruct vent hole in negative terminal.

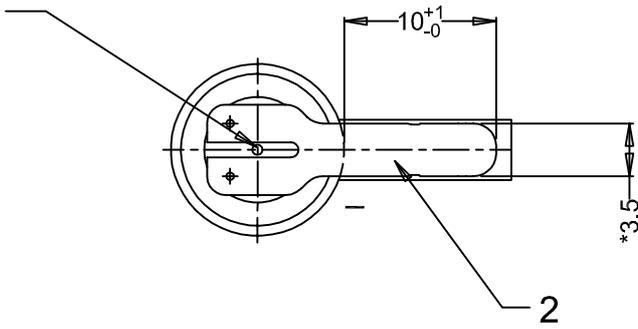

Remove sleeving from face of positive pole before welding.

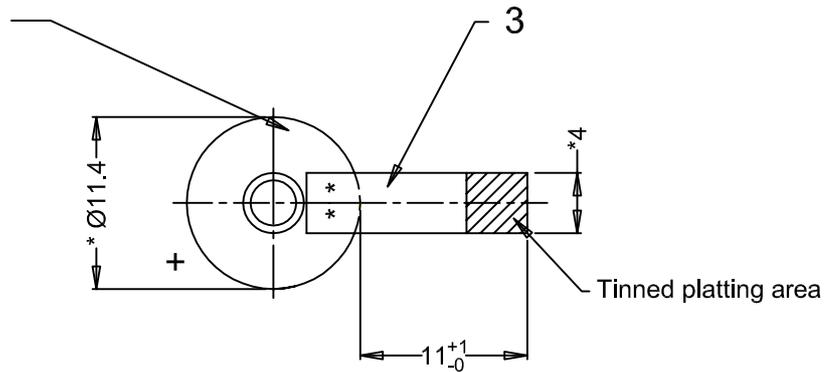

Note: *Dimensions for reference only

Approx. wt : 5 g

6	11-R021	To add tinned plating area on tag	2011-02-16	TitisWS	
5	R021/10	Correction projection	2010-03-04	Syamsul	
4	R298/09	Remove wheeled bin label	2009-06-08	Eka	
3	R219/09	To add wheeled bin label	2009-02-23	Eka	
No	AO No	Revisions	1	Date	Name

Projection:		Material: Refer to part list no: 005173		Description: 3V CR 2 NP LF battery Lithium cell	
Dimensions in mm	Prepared & Checked	Verified & Approved	Dwg. No: 005173	4	06
Tolerance: As specified	2000-06-24	TitisWS	VKB Order No: 06202 301 501		
Scale: 2 : 1					

Rights reserved to make technical changes, as a result of further development, without notice. This drawing is the property of VARTA Microbattery and must not be copied or disclosed to a third party without the written consent of VARTA Microbattery.

