


Hexalobular (6 Lobe) socket set screws with flat point

BN 11493

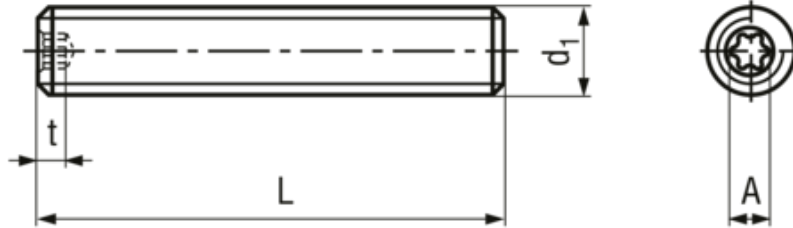

Drive	Hexalobular socket
Material	Steel
Surface	zinc plated blue
Hardness	45 H
Standard	DIN 34827 FL, ~ISO 4026
Warnings	<p>ISO 4042</p> <p>Quenched and tempered fasteners ≥ 360 HV and tempered case-hardened fasteners with electroplated coatings: Susceptible to hydrogen embrittlement!</p> <p>Further notice to residual risks can be found in the introduction section.</p> <p>Set screws are not intended to be tensile-loaded.</p>

Article no	d1	L	Hexalobular socket	t min	A~
3060199	M3	3	X6	0.8	1.75
3060200	M3	4	X6	0.8	1.75
3060201	M3	6	X6	0.8	1.75
3060202	M3	8	X6	0.8	1.75
3060203	M3	10	X6	0.8	1.75
3060204	M4	3	X8	1	2.4
3060207	M4	4	X8	1	2.4
3060208	M4	6	X8	1	2.4
3060213	M4	8	X8	1	2.4
3060215	M4	10	X8	1	2.4
3060219	M4	12	X8	1	2.4
3646004	M4	16	X8	1	2.4
3060221	M5	4	X10	1.3	2.8
3060222	M5	6	X10	1.3	2.8
3060223	M5	8	X10	1.3	2.8

Article no	d1	L	Hexalobular socket	t min	A~
3060224	M5	10	X10	1.3	2.8
3060225	M5	12	X10	1.3	2.8
3060226	M5	16	X10	1.3	2.8