

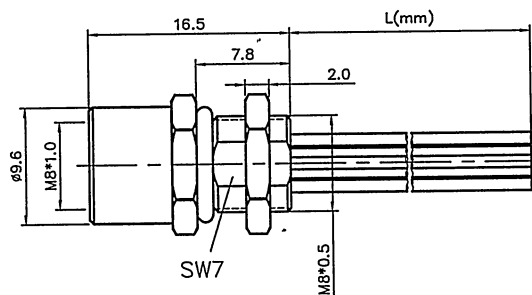


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



Panel cut

SD-M8X-XXP-FF-SH7BXX-00A(H)

Coding: A,B

Pin number: 03,04,
05,06,08XX: 150~1500mm
15: 150±15mm
30: 300±20mm
50: 500±20mm
A0: 1000±40mm
A5: 1500±40mm
Wire Length(L): 150~1500mm

NOTES:

- Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A
- Withstanding voltage : 3,4pin: AC850V/1Min
5,6,8pin: AC650V/1Min

3.Levels of protection: IP67

4.Wire specifications :

- 3pin: 24AWG/0.25mm², UL1061
- 4pin: 24AWG/0.25mm², UL1061
- 5pin: 24AWG/0.25mm², UL1061
- 6pin: 26AWG/0.14mm², UL1061
- 8pin: 26AWG/0.14mm², UL1061

5.Wire connection mode: soldering

6.Operating temperature: -25°C~+80°C

7.For Panel Thickness Range: 2.0~3.0mm

8.RoHS Compliance

9.Tolerance :

- .X ±0.25mm
- .XX ±0.1mm
- Angles ±1°

3pin A Coding	4pin A Coding	5pin B Coding	6pin A Coding	8pin A Coding
Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View
4 Black	4 Black	4 Black	4 Black	4 Yellow
3 Blue	3 Blue	3 Blue	3 Blue	3 Green
1 Brown	2 White	2 White	2 White	2 Brown
Pin Wire Color	Pin Wire Color	Pin Wire Color	Pin Wire Color	Pin Wire Color
Pin Out	Pin Out	Pin Out	Pin Out	Pin Out

PART NO.: SDM8XXXPFSSH7BXX00AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
APPD: 2X 2019.05.20	NAME: SD-M8X-XXP-FF-SH7BXX-00A(H)
CHKD: LD 2019.5.2	TITLE: CUSTOMER DRAWING
DRFT: SQ 2019.05.17	REV: D0-1
THIRD ANGLE PROJECTION	DRAWING NO.: XXXXXXXX-XX-CXX
	SHEET: 1/1
	SCALE: 1:1