




## Data sheet Product BLY 2 10




PCB connectors>Female headers  
for □ 0.5 mm and up to 0.56 mm Ø

## Features

|  |   |
|--|---|
| grid:                                      | <b>2 mm</b>   |
| no. of contacts:                           | <b>10</b>   |
| contact material:                          | <b>CuZn-alloy</b>   |
| contact sleeve:                            | <b>tin-plated</b>   |
| surface contact /<br>contact sleeve:       | <b>Ni+4...6µm Sn</b>  |
| contact spring:                            | <b>gold-plated</b>  |
| inner contact spring<br>material:          | <b>CuBe-alloy</b>   |
| inner contact spring<br>surface:           | <b>Ni+0,25µm Au</b>   |
| type internal spring:                      | <b>6-fingers</b>  |
| plugability for circuit<br>points:         | <ul style="list-style-type: none"><li>• □0,45...0,5mm</li><li>• Ø0,4...0,56mm</li></ul> |
| insert depth:                              | <b>2.5...3.8mm</b>  |
| insertion / drawing force:                 | <b>1.3N/0.3N</b>  |
| shock resistance:                          | <b>50 g</b>   |
| volume resistance:                         | <b>≤10 mΩ</b>   |
| vibration resistance max.:                 | <b>15 g</b>   |
| capacity between two<br>adjacent contacts: | <b>≤0,7 pF</b>  |
| nominal current:                           | <b>2.5 A</b>  |
| nominal voltage:                           | <b>100 V DC</b>   |
| test voltage:                              | <b>500 V</b>  |
| insulating body material:                  | <b>PA 4.6. GF</b>   |

|                                 |  |
|---------------------------------|--|
| temperature range:              | <ul style="list-style-type: none"><li>• <b>-40°C... +163°C</b></li><li>• <b>(260°C/10 s)</b></li></ul> |
| class of inflammability:        | <b>UL 94 V-0</b>   |
| version:                        | <b>standard</b>  |
| specific insulation resistance: | <b>&gt;10<sup>7</sup> Ω·m</b>  |
| connection type:                | <b>THT (soldering)</b>   |
| reflow solderable:              | <b>yes</b>   |

## Technical Drawing

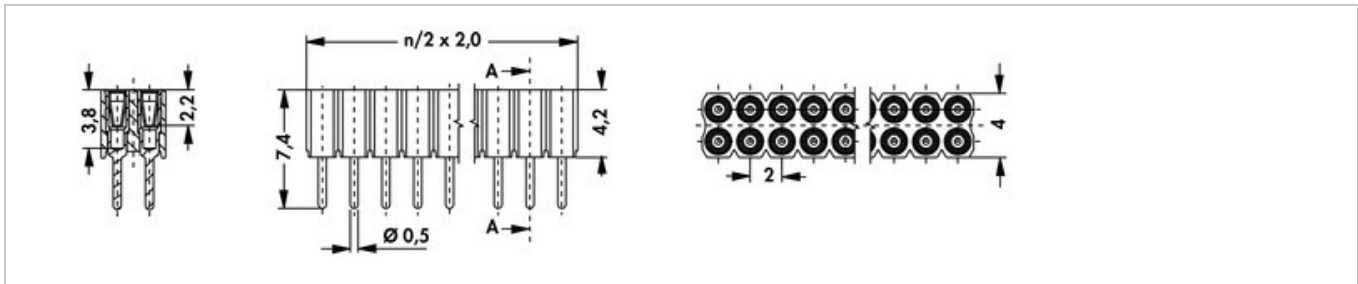

**Fischer Elektronik GmbH & Co. KG**  
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
58511 Lüdenscheid

Telefon +49 2351 435-0  
Telefax +49 2351 45754

[info@fischerelektronik.de](mailto:info@fischerelektronik.de)  
[www.fischerelektronik.de](http://www.fischerelektronik.de)