

## Data sheet Product SL 11 139 4 G




PCB connectors>Male headers  
one row,  $\square$  0.635 mm

### Features

grid:	2.54 mm
no. of contacts:	4
contact material:	CuSn alloy
surface of contact:	gold-plated
surface contact / contact sleeve:	<ul style="list-style-type: none"> <li>• Ni+<math>\geq 0.2\mu\text{m}</math> Au</li> <li>• Ni+4...6<math>\mu\text{m}</math> Sn</li> </ul>
version:	standard
volume resistance:	$\leq 5\text{ m}\Omega$
nominal current:	3 A
nominal voltage:	250 V AC
test voltage:	2000 V
insulating body material:	PA 4.6. GF
temperature range:	<ul style="list-style-type: none"> <li>• -40°C... +163°C</li> <li>• (260°C/10 s)</li> </ul>
class of inflammability:	UL 94 V-0
specific insulation resistance:	$>10^7\ \Omega\cdot\text{m}$
connection type:	THT (soldering)
reflow solderable:	yes

## Technical Drawing

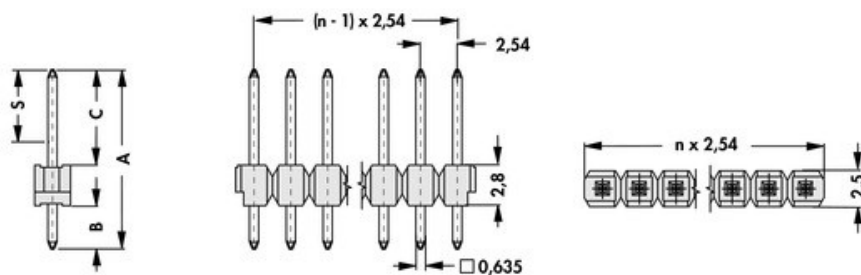

height:	<b>13.9 mm</b>
B:	<b>3 mm</b>
C:	<b>8.1 mm</b>
S:	<b>5.0 mm</b>

**Fischer Elektronik GmbH & Co. KG**  
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
58511 Lüdenscheid

Telefon +49 2351 435-0  
Telefax +49 2351 45754

[info@fischerelektronik.de](mailto:info@fischerelektronik.de)  
[www.fischerelektronik.de](http://www.fischerelektronik.de)