



Data sheet Product SL 11 SMD 062 4 G

PCB connectors>Male headers

□ 0.635 mm

... **packing (option) - additions:**

SL 11 SMD 040-104 ... SM; ... B SM: 6-40 contacts


SL 11 SMD 040-078 ... B TR: 6-24 contacts, 250 pcs/reel

SL 11 SMD 104-130 ... B TR: 6-24 contacts, 150 pcs/reel

Features

grid:	2.54 mm
no. of contacts:	4
contact material:	CuSn alloy
surface of contact:	gold-plated
surface contact / contact sleeve:	<ul style="list-style-type: none"> • Ni+≥0.2µm Au • Ni+4...6µm Sn
volume resistance:	≤5 mΩ
nominal current:	3 A
nominal voltage:	250 V AC
test voltage:	2000 V
insulating body material:	PA 4.6. GF
temperature range:	<ul style="list-style-type: none"> • -40°C... +163°C • (260°C/10 s)
class of inflammability:	UL 94 V-0
specific insulation resistance:	>10 ⁷ Ω·m
connection type:	SMD
reflow solderable:	yes
packing (optional):	<ul style="list-style-type: none"> • bar magazine • pick and place pad and bar magazine • pick and place pad and tape and reel

Technical Drawing



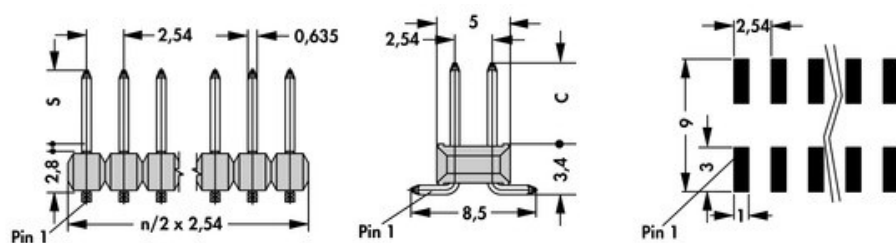


C: 6.7 mm


S: 5.0 mm

Equipping


- reel diameter Ø 330 mm




SL 11 SMD ... SM




SL 11 SMD ... B SM



SL 11 SMD 040-062 ... B TR

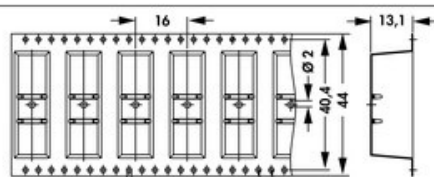

SL 11 SMD 078 ... B TR

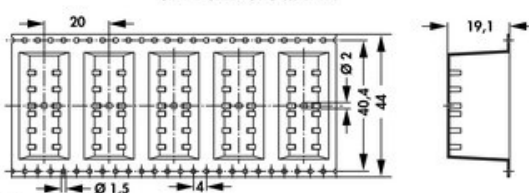

SL 11 SMD 104-130 ... 6-24 ... B TR

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de