



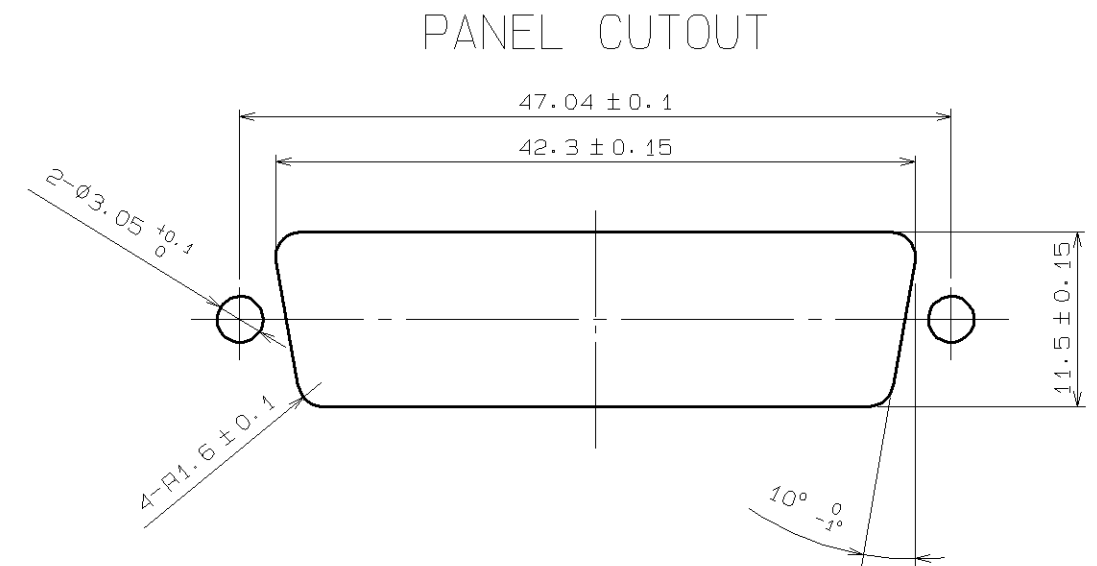


Mar.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

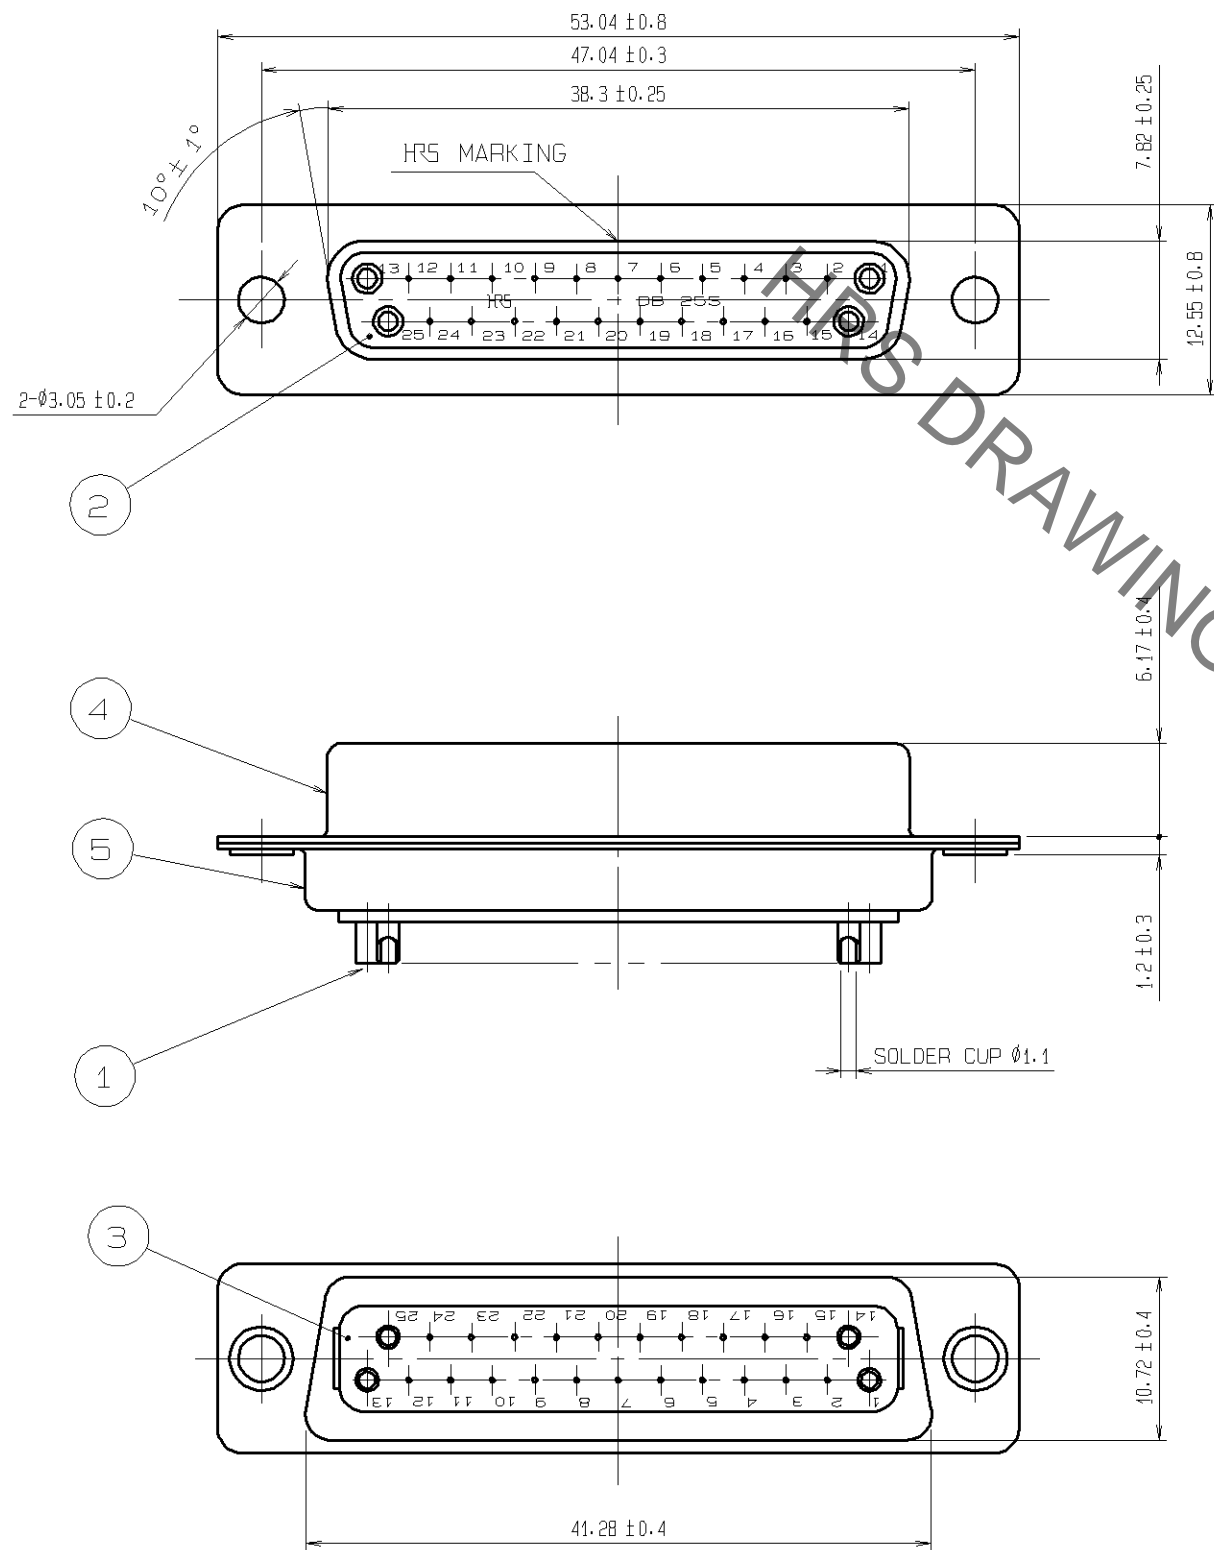

NOTE 1. SOLDERING SHALL BE DOWN WITH SOLDERING BIT OF 40W MAX WITHIN 4s.
2. CONTACT AREA: GOLD PLATING $0.2\mu\text{m}$ MIN
TERMINAL AREA: GOLD PLATING $0.03\mu\text{m}$ MIN
UNDERPLATING: NICKEL PLATING $1\mu\text{m}$ MIN

3	PBT	UL94V-0 BLACK						
2	PBT	UL94V-0 BLACK		5	STEEL	NICKEL PLATING 2μm		
1	PHOSPHOR BRONZE	2		4	STEEL	NICKEL PLATING 2μm		
NO.	MATERIAL	FINISH. REMARKS		NO.	MATERIAL	FINISH. REMARKS		
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HO.MIWA	06.07.26	DRAWING NO.	EDC3-009500-03			
		CHECKED : HO.MIWA	06.07.26	PART NO.	HDBB-25S(05)			
		DESIGNED : YH.ENAMI	06.07.26	CODE NO.	CL211-0216-0-05			
		DRAWN : YH.ENAMI	06.07.26					