


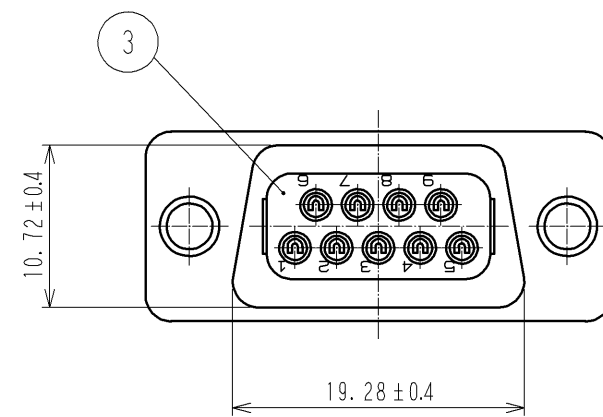
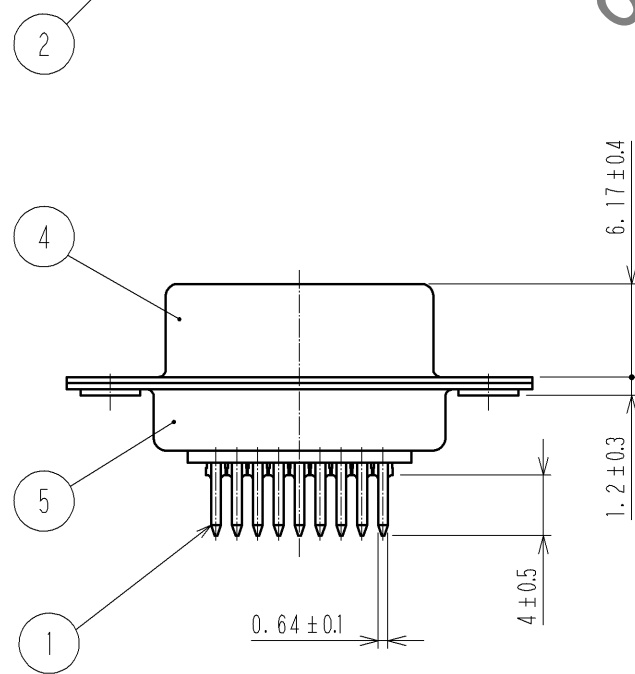


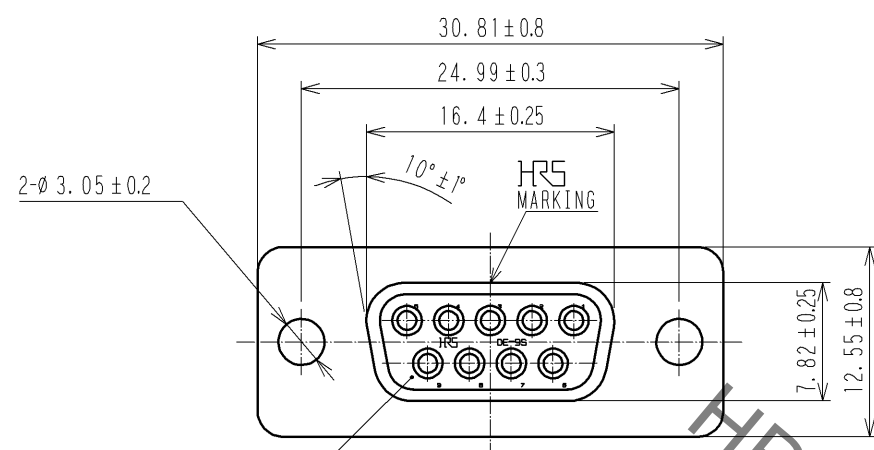


Mar.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

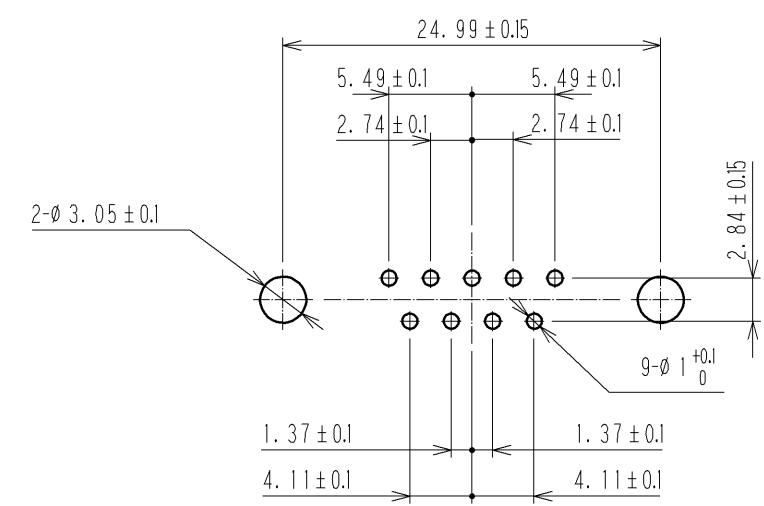

RECOMMENDED PC BOARD HOLE PATTERN  
( MOUNTING SIDE )



3	PBT	(BLACK)UL94V-0	5	STEEL	OVER: Ni 2μm min UNDER: Cu 5μm min			
2	PBT	(BLACK)UL94V-0			OVER: Ni 1μm min UNDER: Cu 5μm min			
1	PHOSPHOR BRONZE	CONTACT: Au 0.2μm min LEAD: Au 0.03μm min UNDER: Ni 2μm min	4	STEEL	OVER: Ni 1μm min UNDER: Cu 5μm min			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.			APPROVED : YH. ENAMI		09.08.08	DRAWING NO. EDC3-009835-02		
			CHECED : YH. ENAMI		09.08.08	PART NO. SDEB-9S(55)		
			DESIGNED : KI. NAGANUMA		09.08.08	CODE NO. CL211-0248-6-55		
			DRAWN : KI. NAGANUMA		09.08.08	 1/1		