
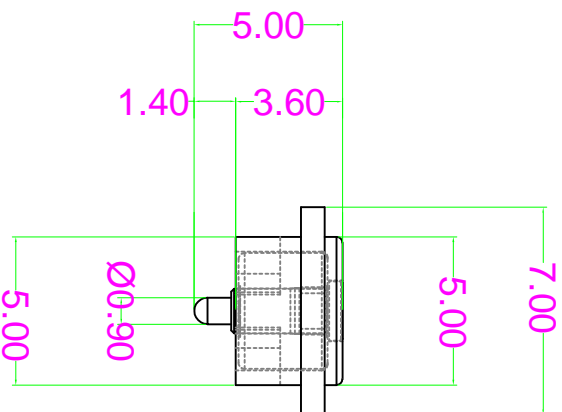
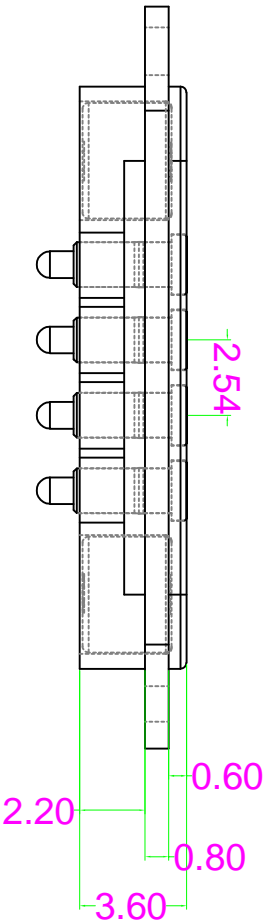



版本	修改内容	修订者	日期

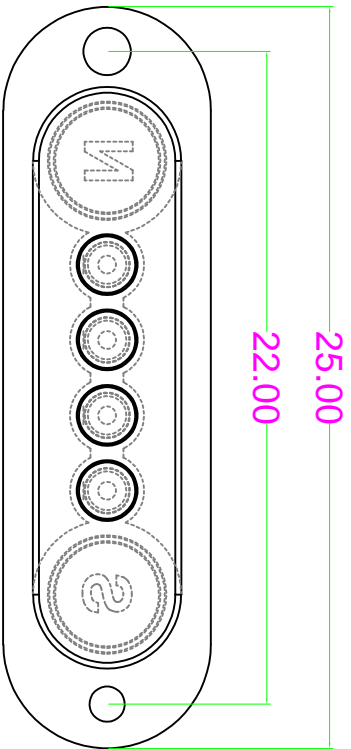

NOTE

1. Material  
Plunger: Brass 3604  
Barrel: Brass 3604
2. Plating for plunger and barrel  
Plunger: 3 micro-inch minimum Au over 50 micro-inch nickel
3. Electrical  
Rated current & voltage: DC 12V; 1A Max.  
Contact resistance: 50 mohm maximum at normal working height(quiesscence)
4. To ensure the best usage, please operate it based on the working height Based on the engineering drawings, shall not exceed the maximum allowed compression
5. To avoid arcing issue, The adaptor start to power supply after connector mated fully.
6. RoHS and HF compliant product.
7. SALT SPRAY: 24H

图纸编号		Shenzhen QH Industrial Co.,Ltd			
PINXXX					
第三角法  单位 mm		TITLE		POGO PIN	
UNLESS OTHERWISE SPECIFIED TOLERANCE  X, ± 0.15 X ± 0.10 XX ± 0.05 XXX ± 0.02 X° ± 2°		DWG NO.			
		APPROVAL		DATE	
		DRAWN			
		CHECKED			
		SIZE:A4		SCALE:1:1	
				SHEET 1 OF 1	