



Steckermaßtoleranzen: ± 1 mm
Plug size tolerances: ± 1 mm

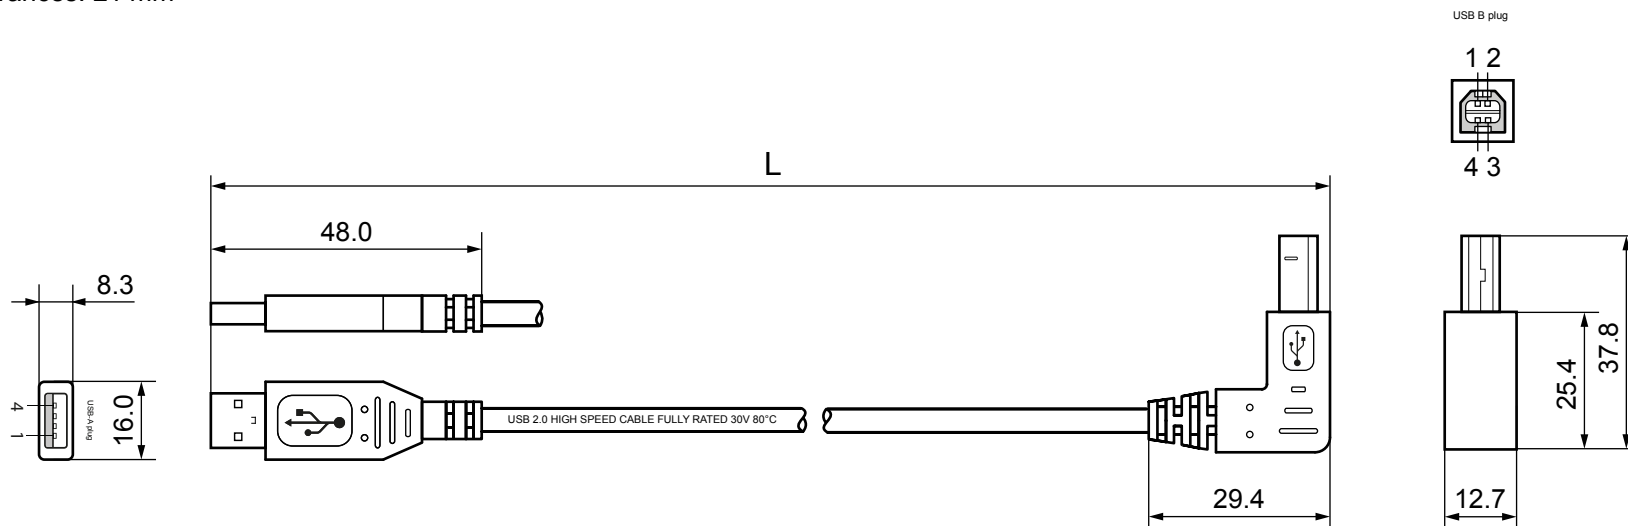

Nr. / No.	Länge / Length (m)
93577	2.00
93578	3.00

USB 2.0 Hi-Speed Kabel

- USB-A Stecker > USB-B 90° Winkelstecker
- USB Standard: High Speed USB 2.0
- Innenleiter: 2xAWG24 + 2xAWG28 Kupfer
- Isolierung: PVC
- Schirmung: doppelt
- Datenrate: max. 480 Mbit/s

- RoHS-konform

USB 2.0 Hi-Speed cable

- USB-A plug > USB-B 90° angled plug
- USB Standard: High Speed USB 2.0
- Inner conductor: 2xAWG24 + 2xAWG28 copper
- Insulation: PVC
- Shielding: double
- Data rate: max. 480 Mbps

- RoHS compliant

Änderungen

Datum	Name	gez.:	Datum	Name
20.03.2015	tf	gez.:	04.11.2011	tf
		gepr.:	04.11.2011	tf
		Norm:		
		Änderungen vorbehalten / subject to change		

Bezeichnung

USB AB 90° HiSpeed 2.0

Zeichnungs-Nr.:



Blatt

von