FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

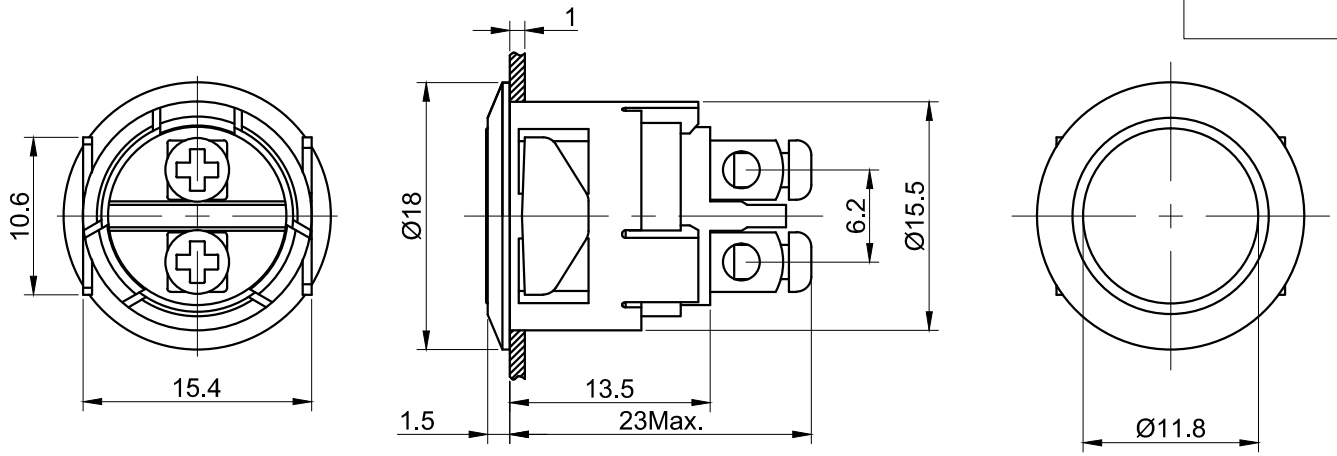

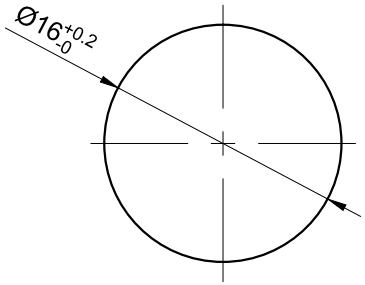

PANEL THICKNESS 1 mm



Seal Ring

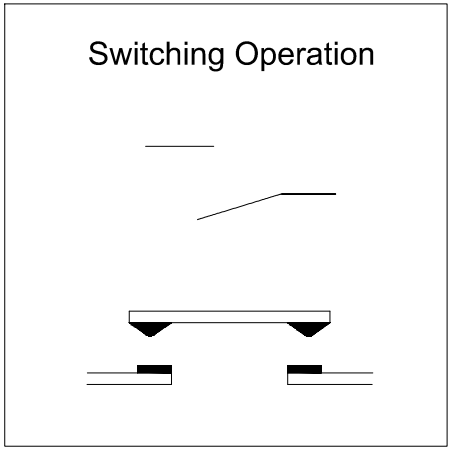

SPECIFICATIONS:

1.Switch Rating: AC220V/0.5A, DC36V/2A.
2.Mechanical Life: ≥1,000,000cycles.
3.Electrical Life: ≥200,000cycles(DC 36V);
≥50,000cycles(AC 220V).
4.Contact Resistance: ≤50mΩ.
5.Insulation Resistance: ≥1,000MΩ.
6.Dielectric Strength: 1,500V, RMS 50Hz, 1min.
7.Operating Temperature: -25℃～ +55℃(No Freezing).
8.Operating Force: About 4N.
9.Operating Travel: About 2mm.
10.Torque: About 0.6Nm max.applied to nut.
11.Protection degree: IP65;IK08.
12.Terminal Type: Screw Terminal.

MATERIALS:

1.Contact: Silver alloy.
2.Button: Stainless Steel.
3.Body: PC.
4.Base: PBT.

Part Number: GQ16F-10 / PC

BRAND 品牌 ONPOW

红波按钮制造有限公司
ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

DIMENSIONS	TOLERANCE
0.00 TO 18.00mm	±0.43mm
18.01 TO 30.00mm	±0.52mm
30.01 TO 50.00mm	±0.62mm
50.01 TO 80.00mm	±0.74mm

USED 用途		APPD 审核	CH 2017/03/04
FINISH 处理		CHKD 校对	NCH 2017/03/04
SCALE 比例 2 / 1	UNIT 单位 mm	DR. 制图	ZPD 2017/03/04
TITLE 名称	Mosaic push button		
DWG NO. 图号	GQ16F-10-PC	SIZE 图纸	A4
FILE NAME 档案名称	GQ16-10PC.DWG	SHEET 张	1 / 1
REV. 更改	1		