FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

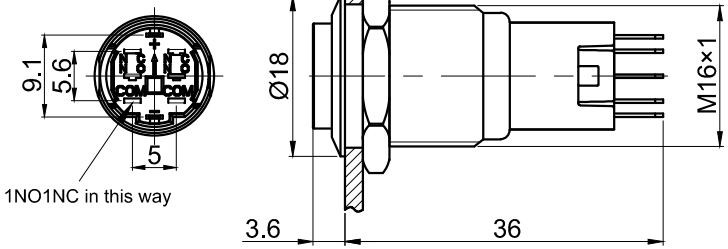

The shaded part is illuminated





PANEL CUTOUT
MAX.PANEL THICKNESS
10 mm



Seal Ring



Contact Composition

Part Number:LAS2GQH-□■D/△/▲/◎/☆

"□"	Contact structure
11	1NO1NC
22	2NO2NC

"■"	Operation mode
No Letter	Momentary
Z	Latching

"△"	Lamp Color
R	Red
G	Green
Y	Yellow
B	Blue
W	White

"▲"	Lamp Voltage
6V	AC/DC 6V
12V	AC/DC 12V
24V	AC/DC 24V
110V	AC/DC 110V
220V	AC/DC 220V

Other voltage can be made to order

"◎"	Crust material
S	Stainless steel
A	Al alloy(black)
N	Nickel Plated Brass

"☆"	IP Class
No Letter	IP40
P	IP65
FP	IP67

SPECIFICATIONS:

1.Switch Rating: AC220V/0.5A, DC110V/0.1A.
2.Mechanical Life: ≥1,000,000cycles.
3.Electrical Life: ≥50,000cycles.
4.Contact Resistance: ≤50mΩ.
5.Insulation Resistance: ≥1,000MΩ.
6.Dielectric Strength: 1,500V, RMS 50Hz, 1min.
7.Operating Temperature: -25℃～ +55℃(No Freezing).
8.Operating Force: About 1.2~1.8N(1NO1NC), About 1.4~2N(2NO2NC).
9.Operating Travel: About 2.3mm.
10.Torque: About 0.6Nm max.applied to nut.
11.Protection degree: IP40/IP65/IP67;IK09.
12.Terminal Type: Pin Terminal(1.8 x 0.4mm), LED Pin(1.8 x 0.3mm).

MATERIALS:

1.Contact: Silver alloy.
2.Button: ◎.
3.Body: ◎.
4.Base: PA.

BRAND 品牌 ONPOW

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

DIMENSIONS	TOLERANCE
0.00 TO 18.00mm	±0.43mm
18.01 TO 30.00mm	±0.52mm
30.01 TO 50.00mm	±0.62mm
50.01 TO 80.00mm	±0.74mm

红波按钮制造有限公司
ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

USED 用途		APPD 审核	CH 2020/04/23
FINISH 处理		CHKD 校对	NCH 2020/04/23
SCALE 比例	1. 2 / 1	UNIT 单位	mm
DR. 制图	ZPD 2020/04/23		
TITLE 名称	GQ Series Anti-vandal push button		
DWG NO. 图号	LAS2GQH-D	SIZE 图纸	A4
FILE NAME 档案名称	LAS2GQF-带灯.DWG	SHEET 张	1 / 1
REV. 更改	1		