



PANEL CUTOUT
MAX.PANEL THICKNESS
10 mm

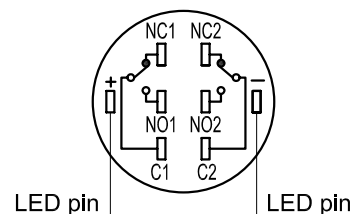

Contact Composition



Seal Ring

The shaded part is light design

FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

Part Number: LAS1-AGQ-□ ■ D/△/▲/◎

"□"	Contact structure
11	1NO 1NC
22	2NO 2NC

	Operation mode		Cap or Lamp Color		Lamp voltage
No Letter	Momentary	R	Red	6V	AC/DC 6V
Z	Latching	G	Green	12V	AC/DC 12V
	Crust Material	Y	Yellow	24V	AC/DC 24V
N	Nickel Plated Brass	O	Orange	110V	AC/DC 110V
S	Stainless Steel	B	Blue	220V	AC/DC 220V
A	Brass(Black)	W	White	Other voltage can be made to order	

SPECIFICATIONS:

- 1.Switch Rating: AC220V/0.5A, DC110V/0.1A.
- 2.Mechanical Life: $\geq 1,000,000$ cycles.
- 3.Electrical Life: $\geq 50,000$ cycles.
- 4.Contact Resistance: $\leq 50\text{m}\Omega$.
- 5.Insulation Resistance: $\geq 1,000\text{M}\Omega$.
- 6.Dielectric Strength: 1,500V, RMS 50Hz , 1min.
- 7.Operating Temperature: $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$ (No Freezing).
- 8.Operating Force: About 2N(1NO1NC), About 3N(2NO2NC).
- 9.Operating Travel: About 3.1mm.
- 10.Torque: About 0.6Nm max.applied to nut.
- 11.IP Class: IP67.
- 12.Terminal Type: Pin Terminal(2.8 x 0.5mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button: .
- 3.Body: .
- 4.Base: PBT.


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

DIMENSIONS	TOLERANCE
0.00 至 18.00mm	±0.43mm
18.01 至 30.00mm	±0.52mm
30.01 至 50.00mm	±0.62mm
50.01 至 80.00mm	±0.74mm

MATERIAL

红波按钮制造有限公司
ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

USED 用途			APPD 审核	CH 2018/03/30
FINISH 处理			CHKD 校对	NCH 2018/03/30
SCALE 比例	1.2 / 1	UNIT 单位	mm	DR. 制图
				ZPD 2018/03/30

TITLE 名称 Anti-vandal push button					
DWG NO. 图号 LAS1-AGQ-D				SIZE 图纸 A4	
FILE NAME 档案名称 LAS1-AGQ-D.DWG		SHEET 张	1 / 1	REV. 更改	1