


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

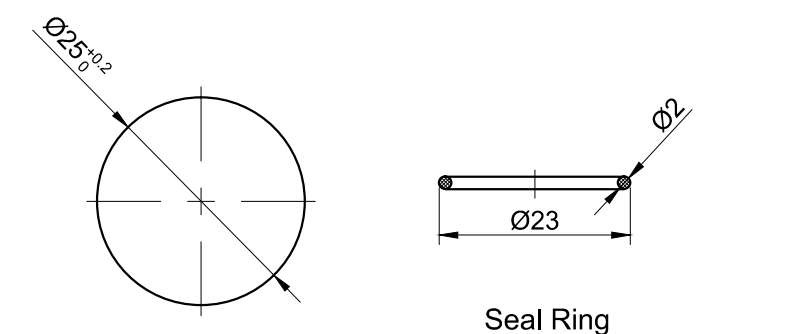

PANEL CUTOUT
MAX.PANEL THICKNESS
10mm

Part Number:GQ25-□■D/△/▲/◎

"□"	Contact structure
11	1NO1NC
22	2NO2NC

"■"	Operation mode
No Letter	Momentary
Z	Latching

"△"	Lamp Color
R	Red
G	Green
Y	Yellow
B	Blue
W	White

"▲"	Lamp Voltage
6V	AC/DC 6V
12V	AC/DC 12V
24V	AC/DC 24V
110V	AC/DC 110V
220V	AC/DC 220V
Other voltage can be made to order	

"◎"	Crust material
S	Stainless steel
A	Al alloy(black)

SPECIFICATIONS:

- 1.Switch Rating: AC220V/2A, DC220V/0.1A.
- 2.Mechanical Life: ≥1,000,000cycles.
- 3.Electrical Life: ≥50,000cycles.
- 4.Contact Resistance: ≤50mΩ.
- 5.Insulation Resistance: ≥1,000MΩ.
- 6.Dielectric Strength: 1,500V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25℃~ +55℃(No Freezing).
- 8.Operating Force: About 5N(1NO1NC)/About 7.5N(2NO2NC).
- 9.Operating Travel: About 2.5mm.
- 10.Torque: About 0.6Nm max.applied to nut.
- 11.Protection degree: IP65,IP67(Momentary can made to order);IK10.
- 12.Terminal Type: Pin Terminal(2.8 x 0.5mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button: ◎.
- 3.Body: ◎.
- 4.Base: PA.

BRAND
品牌

ONPOW

红波按钮制造有限公司
ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

USED
用途

FINISH
处理

SCALE
比例

1.1 / 1

UNIT
单位

mm

APPD
审核

CH

2020/03/04

CHKD
校对

NCH

2020/03/04

DR.
制图

ZPD

2020/03/04

TITLE
名称

GQ Series Anti-vandal push button

DWG NO.
图号

GQ25-D

FILE NAME
档案名称

GQ25-D.DWG

SHEET
张

1 / 1

REV.
更改

1

SIZE
图纸

A4