


T545, Tantalum, Polymer Tantalum, 220 uF, 20%, 16 V, 7343, SMD, Polymer, Molded, High Energy Density, 35 mOhms, Height Max = 4.3mm

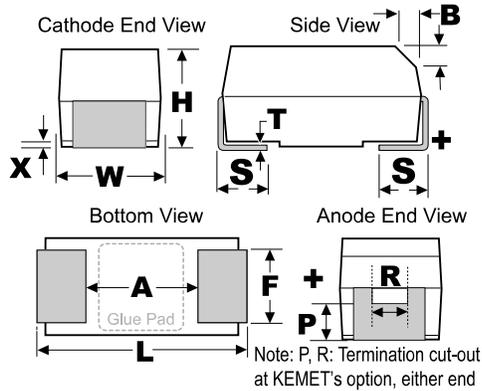

| General Information | |
|---------------------|---|
| Supplier: | KEMET |
| Series: | T545 |
| Dielectric: | Polymer Tantalum |
| Style: | SMD Chip |
| Description: | SMD, Polymer, Molded, High Energy Density |
| Features: | Low ESR |
| RoHS: | Yes |
| Termination: | Tin |

| Dimensions | |
|------------|-----------------|
| Footprint | 7343 |
| L | 7.3mm +/-0.3mm |
| W | 4.3mm +/-0.3mm |
| H | 4mm +/-0.3mm |
| T | 0.13mm REF |
| S | 1.3mm +/-0.3mm |
| F | 2.4mm +/-0.1mm |
| A | 3.8mm MIN |
| B | 0.5mm +/-0.15mm |
| P | 1.7mm REF |
| R | 1mm REF |
| X | 0.1mm +/-0.1mm |

| Specifications | |
|------------------------|--|
| Capacitance: | 220 uF |
| Capacitance Tolerance: | 20% |
| Voltage DC: | 16 VDC (105C) |
| Temperature Range: | -55/+105C |
| Dissipation Factor: | 10% 120Hz 25C |
| Failure Rate: | N/A |
| Resistance: | 35 mOhms (100kHz 25C) |
| Current: | 2660 mAmps (100kHz 45C), 1862 mAmps (85C), 665 mAmps (105C) |
| Leakage Current: | 352 uA (5min 25C) |

| Packaging Specifications | |
|--------------------------|------------|
| Weight: | 588.16 mg |
| Packaging: | T&R, 178mm |
| Packaging Quantity: | 500 |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.