


DIN 439 B

~ISO 4035

Norma ritirata

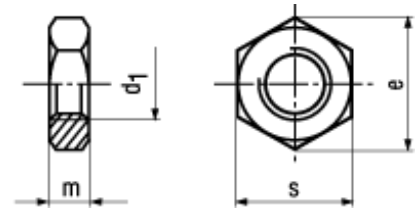

BN 507

Dadi esagonali ~0,5d

Ottone

grezzo

- ~UNI 5589
- ~ČSN 021403

M10; M12; M14: apertura in chiave secondo norma ISO fornibile a richiesta

Article#	d ₁	e min.	s	m max.
1168843	M1,6	3,48	3,2	1
1159542	M2	4,32	4	1,2
1159550	M2,5	5,45	5	1,6
1195670	M3	6,01	5,5	1,8
1195697	M4	7,66	7	2,2
1195700	M5	8,79	8	2,7
1195719	M6	11,05	10	3,2
1195735	M8	14,38	13	4
1195743	M10	18,9	17	5
1195751	M12	21,1	19	6
1159577	(M14)	24,49	22	7
1195786	M16	26,75	24	8
1159593	M20	32,95	30	10