


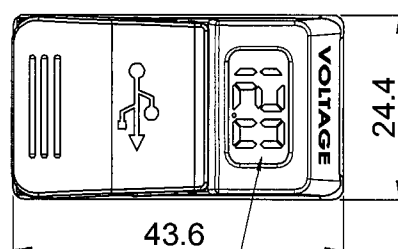
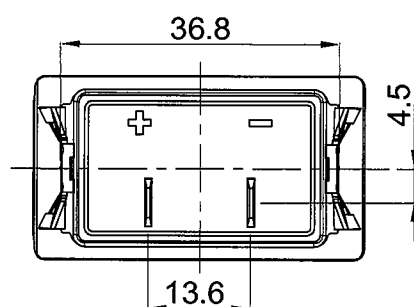
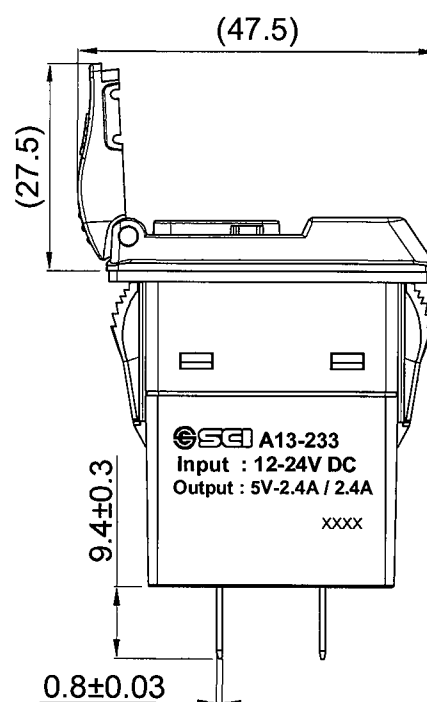


Rating	Input	12-24V DC	<div>Mounting Hole</div> 
	Output	2 Port USB 5V-2.4A/2.4A	
Contact Resistance		50m ohm Max.	
Insulation Resistance		DC 500V 100M ohm Min.	
Operation Temperature		-20°C~+45°C	
Storage Temperature		-20°C~+60°C	Thickness: 1.0~5.5mm

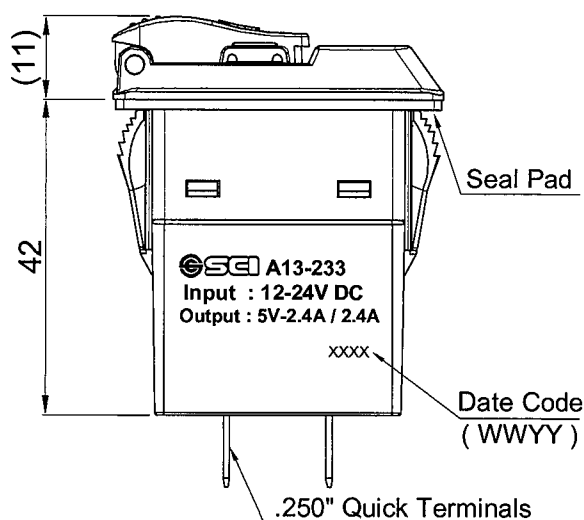

Transparent Ink Lens  
Blue Display Voltage

\*Materials:  
Frame: Black, Nylon 66 (94V-2)  
Terminals : Nickel plated brass .  
Water proof sealing flip cap.  
\*Sealed: Standard socket provides to IP64.

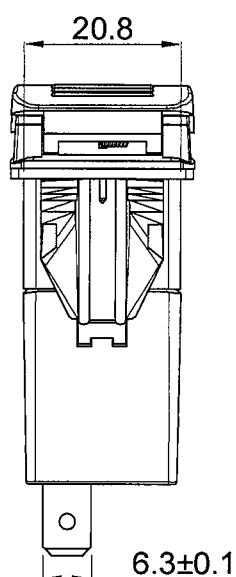

TOLERANCE: ±0.3mm UNLESS OTHERWISE SPECIFIED.

							△
							△
Date	Name	Description					No.
Drawn	Checked	Approved	SCI BOM No.	1251696	Model Name	Dual Port USB Socket With Volt	
Jam Chan			Customer No.		Model No.	A13-233A-01-BBIUV	Rev.
8/25/17			Unit	mm	Shin Chin Industrial Co., Ltd.		0