




**DIN 7985 A**

**~ISO 7045**

Norme abrogée

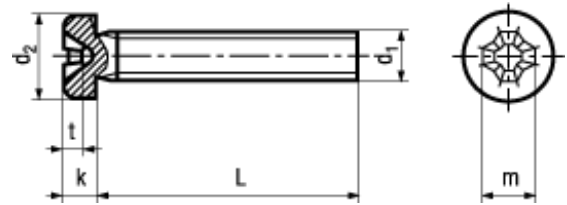


## BN 3311


### Vis à tête cylindrique bombée


avec empreinte cruciforme Pozidriv forme Z

INOX A4

- ~UNI 7687
- ~ČSN 021147

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.		m~	t min.	t max.	L
1541625	M2	4	1,72	1	2,4	1,1	1,35	3
1541633								4
1541641								5
1541668								6
1541676								8
1541684								10
1541692								12
1541706								16
1144200								20
1581694	M2,5	5	2,12	1	2,6	1,27	1,52	3
1541714								4
1541722								5
1541730								6
1541749								8
1541757								10
1541765								12
1541773								16
1541781								20
1144359								25
1541803	M3	6	2,52	1	3	1,68	1,93	4
1541811								5
1541838								6
1541846								8
1541854								10
1541862								12
1581767								(14)
1541870								16

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.		m~	t min.	t max.	L
1673033	M3	6	2,52	1	3	1,68	1,93	(18)
1541889								20
1541897								25
1541900								30
1541919								35
1541927								40
1673068								45
1673130								50
1541935	M4	8	3,25	2	4,3	1,9	2,36	5
1541943								6
1541951								8
1541978								10
1541986								12
1673157								(14)
1541994								16
1673181								(18)
1542001								20
1542028								25
1542036								30
1542044								35
1542052								40
1673246								45
1673351								50
3059868								60
1542060	M5	10	3,95	2	5	2,64	3,1	6
1542079								8
1542087								10
1542095								12
1673416								(14)
1542109								16
1673459								(18)
1542117								20
1542125								25
1542133								30
1542141								35
1542168								40
1673475								45
1673572								50
5807630								60
1542176	M6	12	4,75	3	6,7	3,02	3,48	8
1542184								10

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.		m~	t min.	t max.	L
1542192	M6	12	4,75	3	6,7	3,02	3,48	12
1542206								16
1542214								20
1542222								25
1542230								30
1673580								35
1542249								40
1673645								45
1673726								50
5807640								60