


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

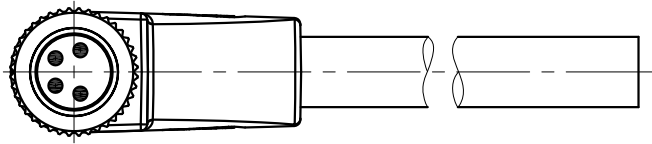


PM-M8X-XXP-MM-SR7XXX-00A(H)

Coding: A,B

Pin number: 03,04,
05,06,08Cable jacket:
A: PVC UL2517;
B: PUR UL20549Cable length
01: 1M
...

99: 99M

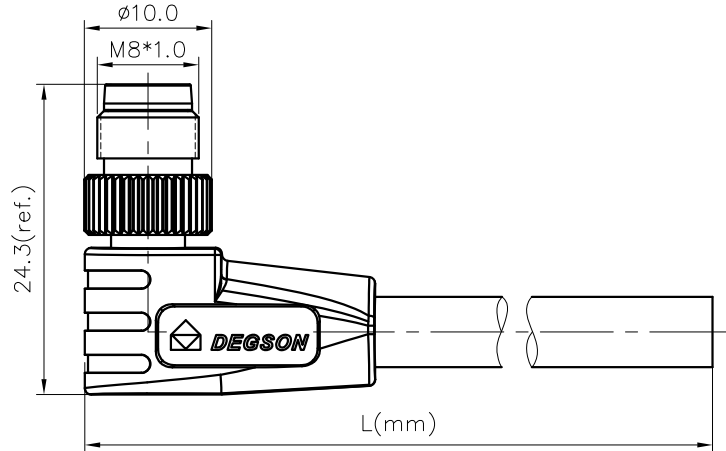The line grows business trip:
01~05m: ± 50mm
06~10m: ± 100mm
11~30m: ± 200mm
31~99m: ± 500mm

NOTES:

- Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A

2. Withstanding voltage : AC800V/1Min

3. Levels of protection: IP67

4. Cable specifications :

3pin: 3C*24AWG/0.25mm², UL2517/UL205494pin: 4C*24AWG/0.25mm², UL2517/UL205495pin: 5C*24AWG/0.25mm², UL2517/UL205496pin: 6C*26AWG/0.14mm², UL2517/UL205498pin: 8C*26AWG/0.14mm², UL2517/UL20549

5. Wire connection mode: soldering

6. Operating temperature: -40°C~+85°C

7. RoHS Compliance

3pin A Coding	4pin A Coding	5pin B Coding	6pin A Coding	8pin A Coding
Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View
4 Black	4 Black	5 Gray	6 Pink	8 Red
3 Blue	3 Blue	4 Black	5 Gray	7 Blue
1 Brown	2 White	3 Blue	4 Black	6 Pink
Conn Wire Color	1 Brown	2 White	3 Blue	5 Gray
Pin Out	Conn Wire Color	1 Brown	2 White	4 Yellow
	1 Brown	3 Blue	1 Brown	3 Green
	2 White	4 Black	2 White	2 Brown
	3 Blue	5 Gray	3 Blue	1 White
	4 Black	6 Pink	4 Black	Conn Wire Color
	5 Gray	7 Blue	5 Gray	Pin Out
	6 Pink	8 Red	6 Pink	

DETACHED LISTS	PART NO.: PMM8XXXPMMSR7XXX00AH		NINGBO DEGSON ELECTRICAL CO., LTD	
	NAME: PM-M8X-XXP-MM-SR7XXX-00A(H)			
	TITLE: CUSTOMER DRAWING		REV	D0-1
	DRAWING NO.: XXXXXXXX-XX-CXX		SHEET	1/1
	DO NOT SCALE DRAWING		SCALE	1:1