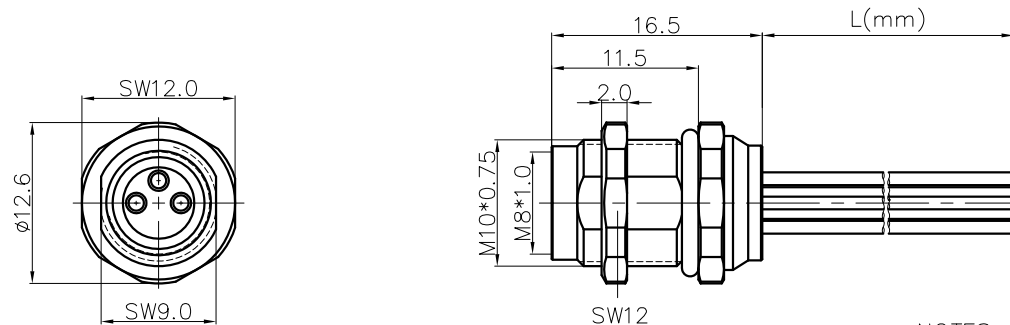


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



SD-M8X-XXP-FF-SF7AXX-00A(H)


Coding: A,B

Pin number: 03,04,
05,06,08XX: 150~1500mm
15: 150±15mm
30: 300±20mm
50: 500±20mm
A0: 1000±40mm
A5: 1500±40mm
Wire Length(L): 150~1500mm


NOTES:

- Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A
- Withstanding voltage : 3,4pin: AC850V/1Min
5,6,8pin: AC650V/1Min
- Levels of protection: IP67
- Wire specifications :
3pin: 24AWG/0.25mm², UL1061
4pin: 24AWG/0.25mm², UL1061
5pin: 24AWG/0.25mm², UL1061
6pin: 26AWG/0.14mm², UL1061
8pin: 26AWG/0.14mm², UL1061
- Wire connection mode: soldering
- Operating temperature: -25°C~+80°C
- For Panel Thickness Range: 2.0~4.5mm
- RoHS Compliance
- Tolerance :
.X ±0.25mm
.XX ±0.1mm
Angles ±1°


3pin A Coding

Pin Assignment
Front View


4pin A Coding

Pin Assignment
Front View


5pin B Coding

Pin Assignment
Front View

6pin A Coding


Pin Assignment
Front View

8pin A Coding

Pin Assignment
Front View

						8	Red
						7	Blue
						6	Pink
						5	Gray
4	Black	4	Black	5	Gray	4	Yellow
3	Blue	3	Blue	4	Black	3	Green
		2	White	3	Blue	2	Brown
1	Brown	1	Brown	2	White	1	White
Pin	Wire Color	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color
Pin Out		Pin Out		Pin Out		Pin Out	

DETACHED LISTS	PART NO.: SDM8XXXPFFSF7AXX00AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SD-M8X-XXP-FF-SF7AXX-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	DRAWING NO.: XXXXXXXX-XX-CXX		REV D0-1
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SHEET 1/1

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTDNAME:
SD-M8X-XXP-FF-SF7AXX-00A(H)

TITLE: CUSTOMER DRAWING

DRAWING NO.: XXXXXXXX-XX-CXX

DO NOT SCALE DRAWING

SCALE 1:1