
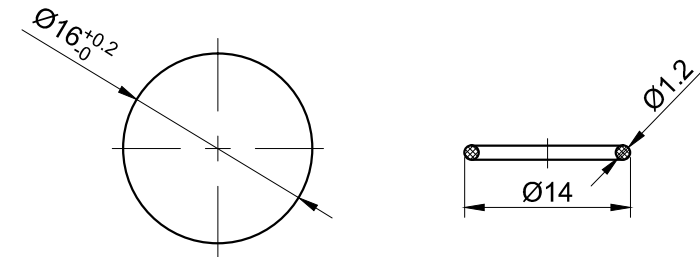


1	2	3	4	5	6	7
				FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人


The shaded part is illuminated

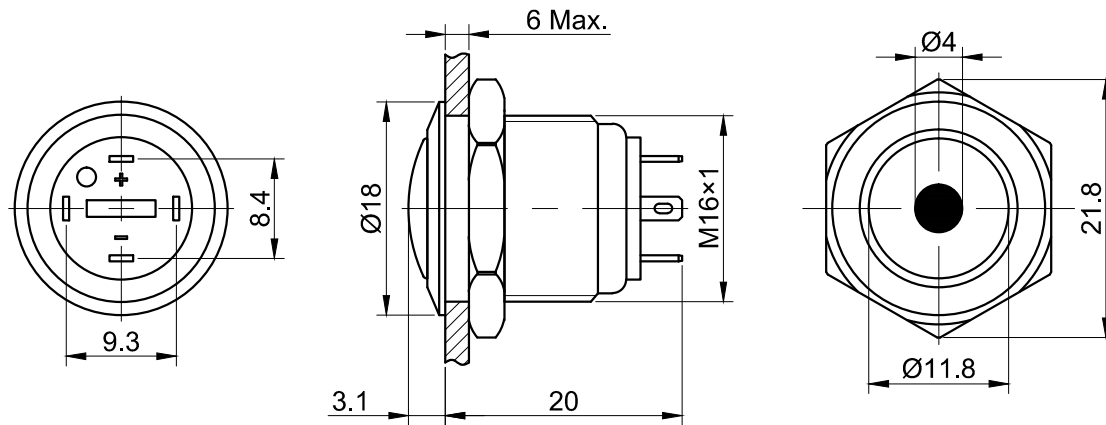

PANEL CUTOUT
MAX.PANEL THICKNESS
6 mm

Seal Ring

Switching Operation



SPECIFICATIONS:

- 1.Switch Rating: AC220V/0.5A, DC36V/2A.
- 2.Mechanical Life: $\geq 1,000,000$ cycles.
- 3.Electrical Life: $\geq 200,000$ cycles(DC 36V);
 $\geq 50,000$ cycles(AC 220V).
- 4.Contact Resistance: $\leq 50\text{m}\Omega$.
- 5.Insulation Resistance: $\geq 1,000\text{M}\Omega$.
- 6.Dielectric Strength: 1,500V, RMS 50Hz, 1min.
- 7.Operating Temperature: $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$ (No Freezing).
- 8.Operating Force: About 4N.
- 9.Operating Travel: About 2mm.
- 10.Torque: About 0.6Nm max.applied to nut.
- 11.Protection degree: IP65,IP67(made to order);IK08.
- 12.Terminal Type: LED Pin (Silver plated brass 2 x 0.5mm);
Switch Pin (Gold plated brass 2 x 0.5mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button: \odot .
- 3.Body: \odot .
- 4.Base: PA.

Part Number:GQ16B-10D/J/ \triangle / \blacktriangle / \odot

" \triangle "	Lamp Color	" \blacktriangle "	Lamp Voltage	" \odot "	Crust Material
R	Red	6V	AC/DC 6V	N	Nickel Plated Brass
G	Green	12V	AC/DC 12V	S	Stainless Steel
Y	Yellow	24V	AC/DC 24V	A	Al alloy(black)
B	Blue	220V	AC/DC 220V		
W	White	Other voltage can be made to order			

BRAND 品牌 ONPOW		红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.		USED 用途	APPD 审核 CH 2019/09/20		
		FINISH 处理	CHKD 校对 NCH 2019/09/20		
		SCALE 比例 1.5 / 1	UNIT 单位 mm	DR. 制图 ZPD 2019/09/20	
		TITLE 名称 GQ Series Anti-vandal push button			
DIMENSIONS		TOLERANCE	DWG NO. 图号 GQ16B-10D-J		SIZE 图纸 A4
0.00 TO 18.00mm		$\pm 0.43\text{mm}$	FILE NAME 档案名称 GQ16B-10DJ.dwg		SHEET 张 1 / 1
18.01 TO 30.00mm		$\pm 0.52\text{mm}$			
30.01 TO 50.00mm		$\pm 0.62\text{mm}$			
50.01 TO 80.00mm		$\pm 0.74\text{mm}$	REV. 更改 1		