




## Tappo V-INOX

Metr.

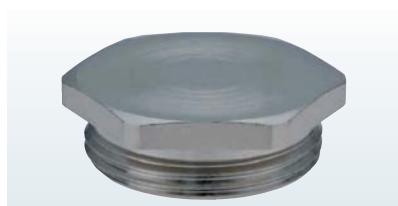


Materiale	INOX 1.4305
O-Ring	NBR / FKM / VMQ
Protezione	IP 68 – 10 bar / IP 69K
Temperatura di impiego	-20 °C – 95 °C (NBR), -20 °C – 180 °C (FKM), -60 °C – 180 °C (VMQ)




AG	GL mm	H mm	 mm	Codice V-INOX-NBR -20 °C – 95 °C	Codice V-INOX-FKM -20 °C – 180 °C	Codice V-INOX-VMQ -60 °C – 180 °C
M 12 x 1,5	6,5	9,5	14	1.152.1200.50	1.153.1200.50	1.154.1200.50
M 16 x 1,5	6	9	19	1.152.1600.50	1.153.1600.50	1.154.1600.50
M 20 x 1,5	6	9,5	22	1.152.2000.50	1.153.2000.50	1.154.2000.50
M 25 x 1,5	7	10,5	30	1.152.2500.50	1.153.2500.50	1.154.2500.50
M 32 x 1,5	8	12,5	41	1.152.3200.50	1.153.3200.50	1.154.3200.50
M 40 x 1,5	8	13	46	1.152.4000.50	1.153.4000.50	1.154.4000.50


## Tappo V-INOX

PG

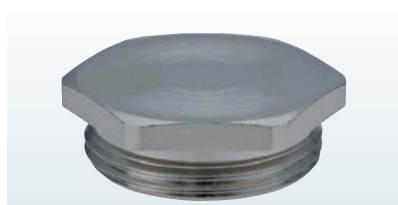

Materiale	INOX 1.4305
O-Ring	NBR / FKM / VMQ
Protezione	IP 68 – 10 bar / IP 69K
Temperatura di impiego	-20 °C – 95 °C (NBR), -20 °C – 180 °C (FKM), -60 °C – 180 °C (VMQ)



AG	GL mm	H mm	 mm	Codice V-INOX-NBR -20 °C – 95 °C	Codice V-INOX-FKM -20 °C – 180 °C	Codice V-INOX-VMQ -60 °C – 180 °C
PG 7	5	8	14	1.152.0700.01	1.153.0700.01	1.154.0700.01
PG 9	6	9	17	1.152.0900.01	1.153.0900.01	1.154.0900.01
PG 11	6	9,5	20	1.152.1100.01	1.153.1100.01	1.154.1100.01
PG 13,5	6,5	10	22	1.152.1300.01	1.153.1300.01	1.154.1300.01
PG 16	6,5	10	24	1.152.1600.01	1.153.1600.01	1.154.1600.01
PG 21	7	10,5	30	1.152.2100.01	1.153.2100.01	1.154.2100.01
PG 29	8	12,5	41	1.152.2900.01	1.153.2900.01	1.154.2900.01
PG 36	8	13	50	1.152.3600.01	1.153.3600.01	1.154.3600.01