



RoHS & REACH Compliant

| Signature | Revision History | Date | Rev. |
|-----------|-------------------------|-------------|------|
| Achy | For Bulk Productio | JUL,08,2016 | 00 |
| Achy | Optimization of drawing | May,10,2017 | 01 |

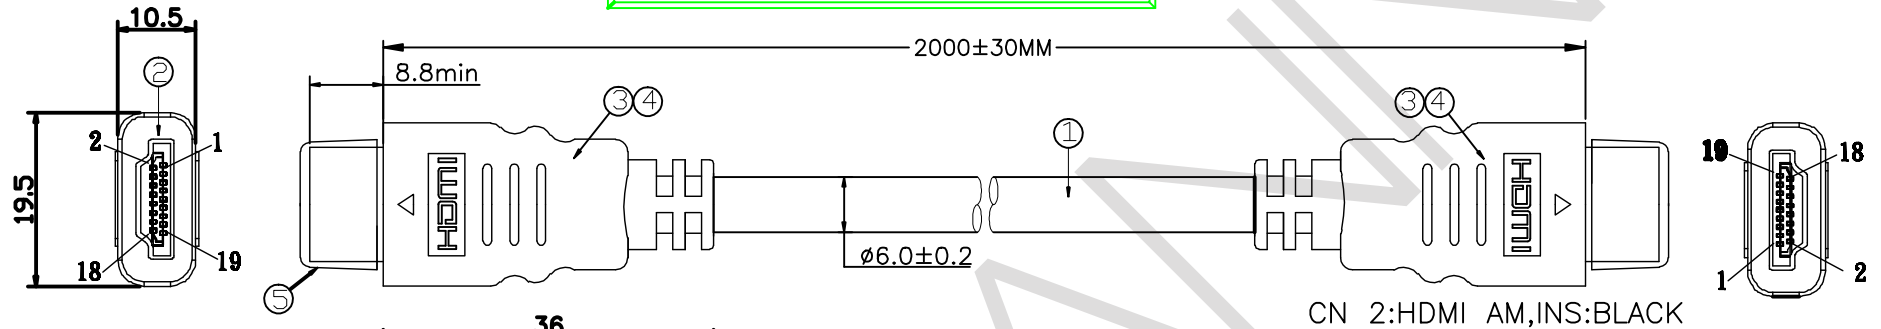


PIN OUT

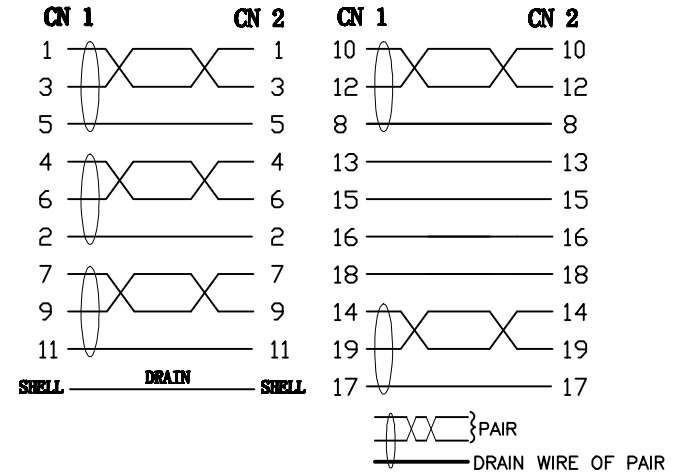

NOTES:

- 1.Cable:(1/0.254BC*1P+1/0.254CCS+AL/M)*5C+1/0.254BC*4C+AL+1/0.254BC+B(64/0.12ALM), Jacket:PVC/Black,OD:6.0±0.2mm.Cable printing:High Speed HDMI Cable with Ethernet
- 2.Connector:CN1&CN2:HDMI A/M,Black Insulator,Shell:Gold plated>Contact:Gold plated
- 3.Inner moulded:LDPE.
- 4.Hood:Moulded type,PVC 88A,Color:Black.
- 5.Dust cap:For HDMI A type male,LDPE.
- 6.TEST:(1)100% OPEN SHORT & MISS WIRE TEST.
(2)CONDUCTOR RESISTANCE 3 ohm Max.
(3)INSULATION RESISTANCE:DC 300V 10MΩ Min
(4)HD-TV:1080P,60HZ.

Cross Section:

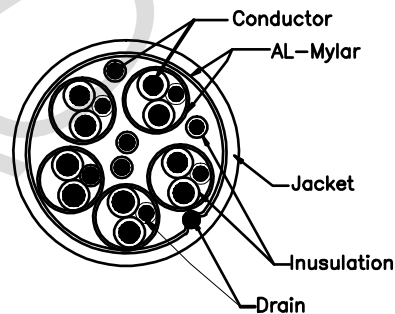

| Date | Name | Part No. |
|------------------------------|------|--|
| Drawn by May.10,2017 Achy | | AK-330107-020-S |
| Checked by May.10,2017 Helen | | EAN:4016032290957 |
| Approved by 15May, 2017 Joe | | |
| ASSMANN Electronic GmbH | | Title HDMI High Speed connection cable,type A M/M,2.0m,w/Ethernrt,Ultra HD 60p, bl,gold |
| | | Scale Unit |
| | | N/A MM |
| | | Sheet 1/2 |

