

DRG. No. C 34597		SWITCH V4NST7YR1-UL	
SHEET OF SHEETS		APPROVED	
DRAWN P.S.T.	DATE 19/3/90	DRAWING OFFICE T. Bell	SALES DEPT. G. W.
TRACED	SCALE 4/1		

SPECIFICATION

ACTUATING FORCE: - 0.9N (3.2ozf) MAX.

RELEASE FORCE: - 0.07N (.25ozf) MIN.

FREE POSITION: - 17.8 (.70) MAX.

OPERATING POSITION: - 15.6^{±1.2} (.61)

MOVEMENT DIFFERENTIAL: -0.4 (.015) MAX.

OVERTRAVEL (AVAILABLE): - DEPRESS
TO CASE


SPECIAL FEATURE :-

TESTED AND STAMPED TO U.L. AND
C.S.A. REQUIREMENTS

APPROVAL RATING :-

5 AMP - 125 OR 250V.AC.

DIAGRAM OF CONNECTIONS

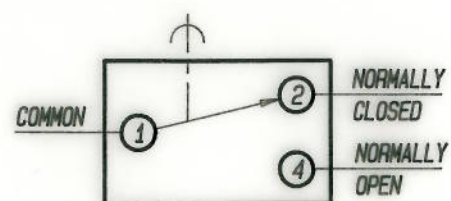

**BURGESS MICRO SWITCH COMPANY LTD.
DUKES WAY, TEAM VALLEY, GATESHEAD,
TYNE & WEAR NE11 0UB**

Tel. 091 4877171 Telex: 53229 Fax: (3) 091 4871610

ISSUE No.
& DATE

THIS DRAWING MUST ONLY BE AMENDED ON CAD SYSTEM

ALL DIMENSIONS SPECIFIED IN MILLIMETRES.
TOLERANCES UNLESS STATED:- NO DECIMAL PLACE ± 0.5
1 DECIMAL PLACE ± 0.25 2 DECIMAL PLACES ± 0.15
ANGULAR $\pm 1^\circ$ INCH-OUNCE UNITS (IN BRACKETS)

DEGREE OF PROTECTION:-

WEIGHT:-

SWITCH

V4NST7YR1-UL

DRG. No.

C 34597

SHEET	OF	SHEETS
-------	----	--------

DO NOT SCALE

INSTALLATION DRAWING

THIRD ANGLE PROJECTION

© THIS DRAWING IS THE PROPERTY OF BURGESS MICRO SWITCH CO. LTD.
AND MUST NOT BE USED OR COPIED, ENTIRELY OR IN PART, WITHOUT THE
PERMISSION OF BURGESS MICRO SWITCH CO. LTD.

